




Quality products for Mechanical  
& Fluid Power



# HQ Series VANE PUMPS

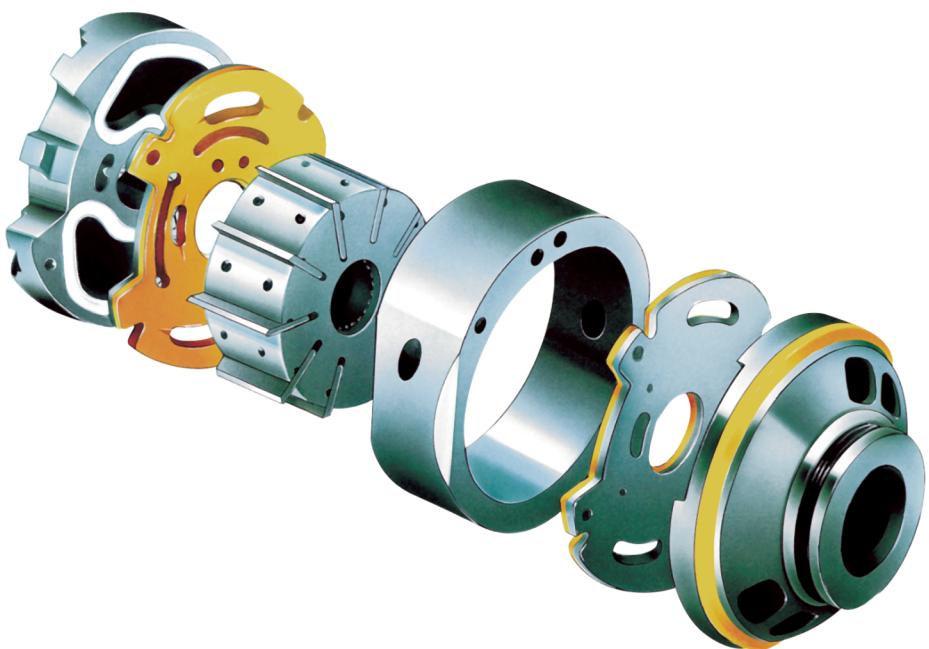


**jbj**  
TECHNIQUES  
LIMITED

# Versatility, power, compactness and low running costs



**V**ersatility, power, compactness and low running costs are the main characteristics of this range of vane pumps. All the components subject to wear are contained in a cartridge unit that can be easily removed for inspection and/or replacement without disconnecting the pump from the circuit, drastically reducing expensive machine down time.

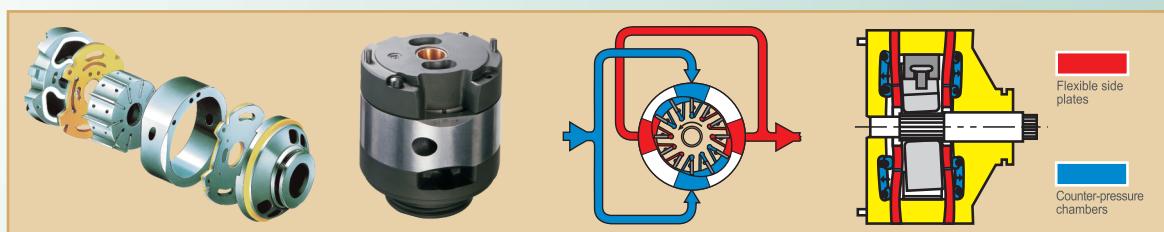

All the components subject to wear are contained in a cartridge unit that can be easily removed for inspection and/or replacement without disconnecting the pump from the circuit, drastically reducing expensive machine down time.

The cartridge contains a rotor, vanes and inserts, a cam ring and two covers. During operation the rotor is driven by a splined shaft coupled to the drive unit. As the rotation speed increases, centrifugal forces, in combination with the pressure generated behind the vanes, push the vanes outwards, where they follow the profile of the cam of the ring with a sufficient contact pressure to ensure

adequate hydraulic sealing. The two opposed pumping chambers formed by the elliptical profile of the cam cancel out radial loads on the shaft bearings, thereby giving them extremely long lifetimes.

The versatility of this series of pumps enables them to meet the requirements of the most varied industrial applications. In fact, as well as their proven high reliability and excellent volumetric efficiency in all working conditions, they operate with particularly low noise levels. This is made possible by the special profile of the cam ring and the use of a 12 vane rotor that reduces the amplitude of the supply

pressure pulses, thereby reducing induced vibrations.

These vane pumps are extremely compact and are supplied with ISO norm mechanical couplings and SAE norm hydraulic fittings. This makes them very easy to install and guarantees their interchangeability with other similar pumps (eg. Vickers, Caterpillar, Denison).

More detailed technical information is available from jbj Techniques Limited.

**jbj Techniques technical office,**  
telephone: 01737 767493  
email: [info@bjj.co.uk](mailto:info@bjj.co.uk)  
[www.bjj.co.uk/vanepumps.html](http://www.bjj.co.uk/vanepumps.html)

The details contained within this catalogue are reproduced in accordance with the latest information at going to press ..... E & OE

Page

Single pump HQ02 series .....	1 - 7
Single pump HQ03 series .....	8 - 12
Double pump HQ21 series .....	13 - 22
Double pump HQ22 series .....	23 - 26
Double pump HQ31 series .....	27 - 35
Double pump HQ33 series .....	36 - 39
Cartridge information .....	40
HQ series operating instructions .....	41
jbj Techniques product list .....	42





### Fixed Displacement Hydraulic Vane Pumps "HQ" Series


The design of the HQ series vane pumps makes them particularly suitable for application on trucks, especially garbage compactors. All the components subject to wear are contained in a cartridge unit that can be easily removed for inspection and/or replacement without disconnecting the pump from the circuit, drastically reducing expensive machine downtime.



The special design of the inner flexible plates of the cartridge enables any thermal expansion in the rotor to be compensated for and to adequately cope with any sudden change in pressure. Furthermore, the two opposed pumping chambers formed by the elliptical profile of the cam cancel out radial loads, dramatically reducing vibrations and considerably increasing the pump lifetime.

In addition to reliability, HQ pump guarantees continuous high volumetric efficiency during its whole service time. That avoids having to compensate the typical efficiency loss of other kinds of pump, increasing the truck engine RPM, which causes higher fuel consumption and therefore air pollution. Such characteristics, along with an extremely low noise-level, make the HQ pump environmentally friendly, in line with the latest ecological trend.

The HQ series is available in 2 versions of single pump (from 39 to 88 l/min at 1000 rpm) and two versions of double pump (from 46 to 134 l/min at 1000 rpm) with maximum powers of over 103 kW.

The pumps are extremely compact and are supplied with different types of either ISO or UNI norm mounting for the direct coupling with PTO and SAE norm hydraulic fittings. That, together with the possibility to orientate the inlet and outlet ports, makes the HQ pumps very easy to install and guarantees their interchangeability with other types of pumps.

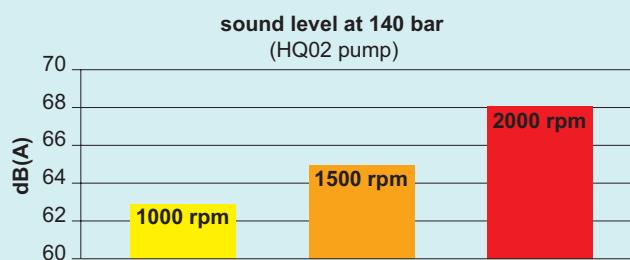

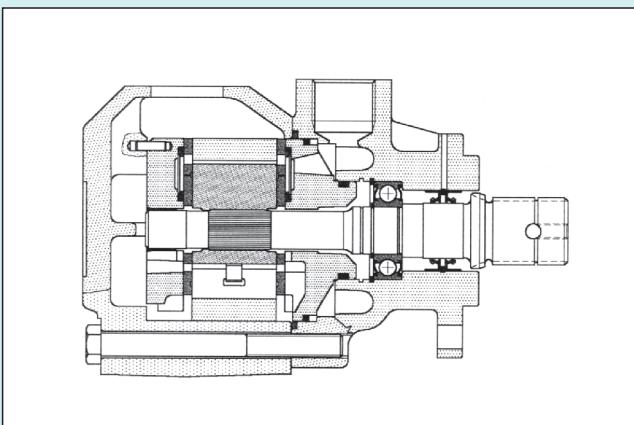

### General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in five different displacements from 39 to 66 l/min (from 10 to 17 gpm) at 1000 rpm and 7 bar.

### Technical characteristics

Cartridge model	Geometric displacement		Rated capacity at 1000 rpm 7 bar		Rated capacity at 1200 rpm 7 bar		Rated capacity at 1500 rpm 7 bar		Maximum pressure with mineral oil		Speed range rpm	
	cm <sup>3</sup> /g	(in <sup>3</sup> /r)	l/min	(gpm)	l/min	(gpm)	l/min	(gpm)	bar	(psi)	min	max
A02-12	40,1	(2.45)	39,1	(10.0)	46,9	(12)	58,8	(15.5)	210	(3050)	600	2700
A02-14	45,4	(2.77)	43,9	(11.7)	52,7	(14)	65,7	(17.4)	210	(3050)	600	2700
A02-17	55,2	(3.37)	53,5	(14.2)	64,2	(17)	80,2	(21.2)	210	(3050)	600	2500
A02-19	60,1	(3.66)	59,2	(15.8)	71,1	(19)	88,7	(23.4)	210	(3050)	600	2500
A02-21	67,5	(4.12)	65,8	(17.5)	79,3	(21)	99,8	(26.4)	210	(3050)	600	2500

**Hydraulic fluids:** mineral oils, phosphate ester based fluids.

**Viscosity range (with mineral oil):** from 13 to 860 cSt. (13 to 54 cSt. recommended).

**Filtration:** for the inlet - 149 micron abs., for the return line - 25 micron abs. or better (**with synthetic fluids:** for the return line - 10 micron abs. or better).


**Inlet pressure (with mineral oil):** from -0,17 to +0,35 bar (-2.5 + 5 psi)

**Operating temperature:** with mineral oil -10°C to +70°C (+30°C to +60°C recommended).


**Drive:** direct and coaxial by means of a flexible coupling.

## Main operating data

**max pressure / hydraulic fluid**

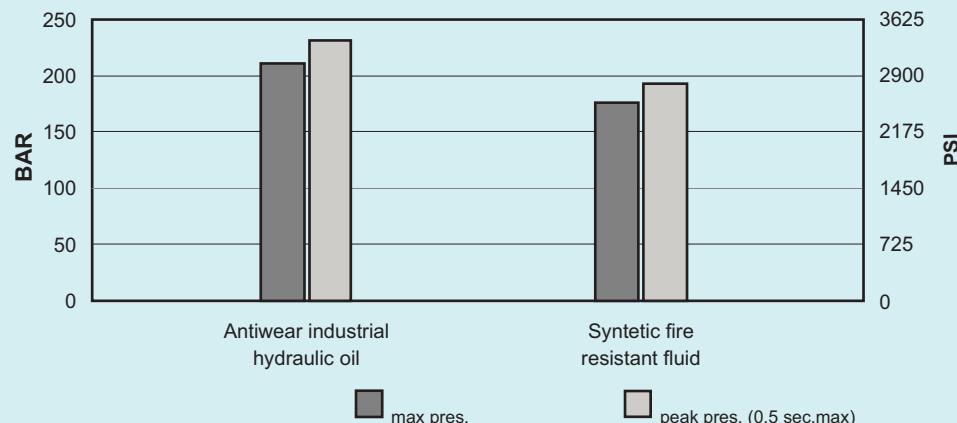





**max speed / hydraulic fluid** (with 0 bar in the intake pipe)

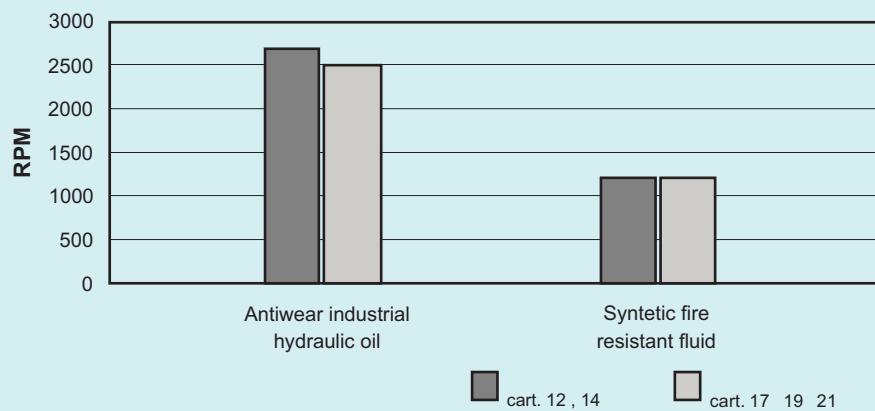




If the intake pressure is not zero bar, use the graph below to find the percentage correction factor to apply to the maximum speed.

**max speed / intake pipe pressure**

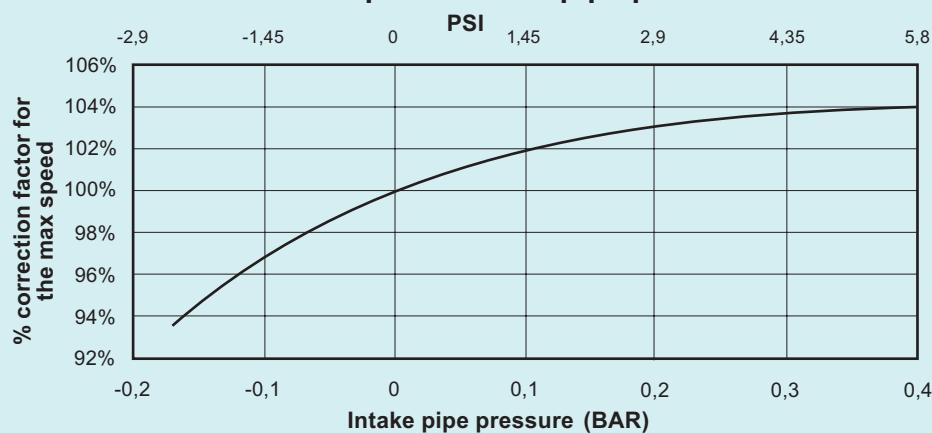

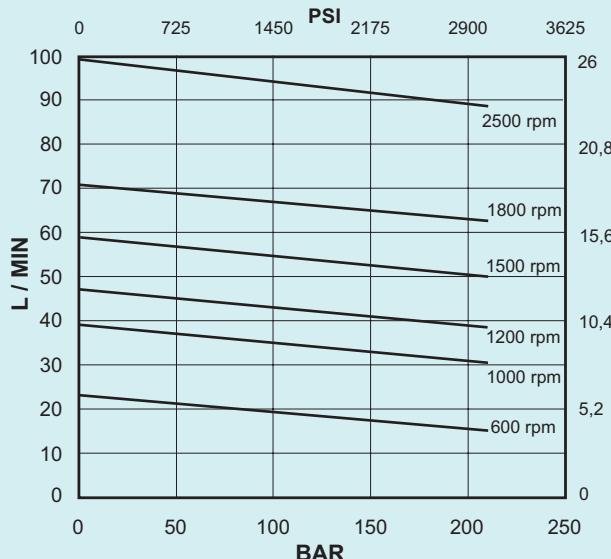
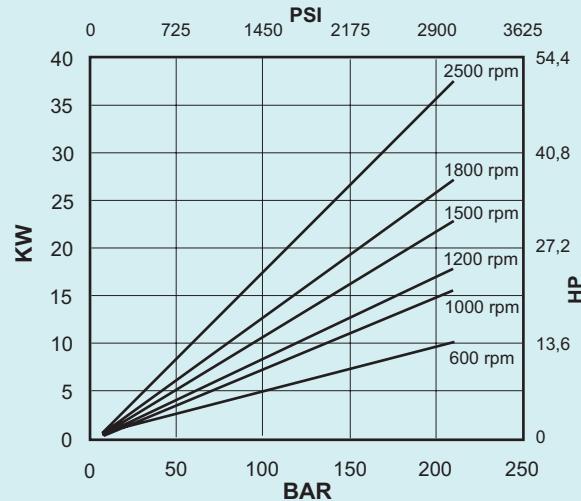
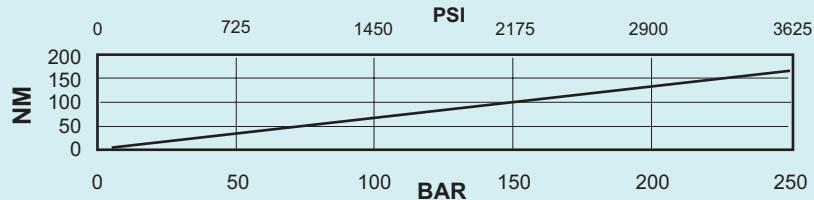
**flow / pressure****Cartridge A02-12****power / pressure****input torque / pressure**

Oil viscosity: 25 c.St. (10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR

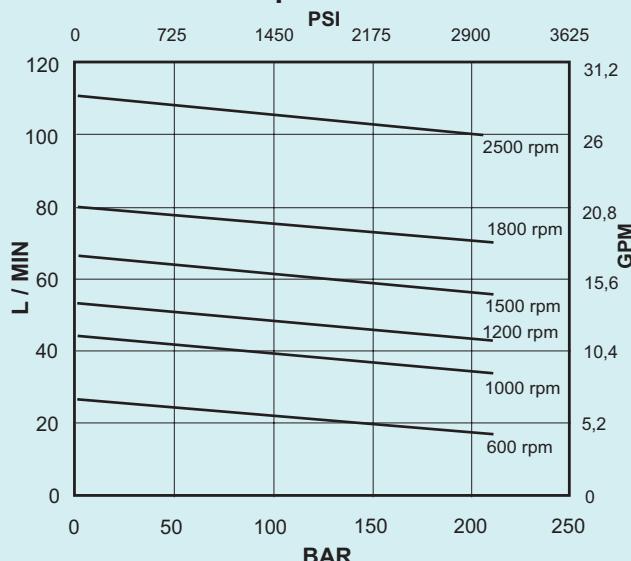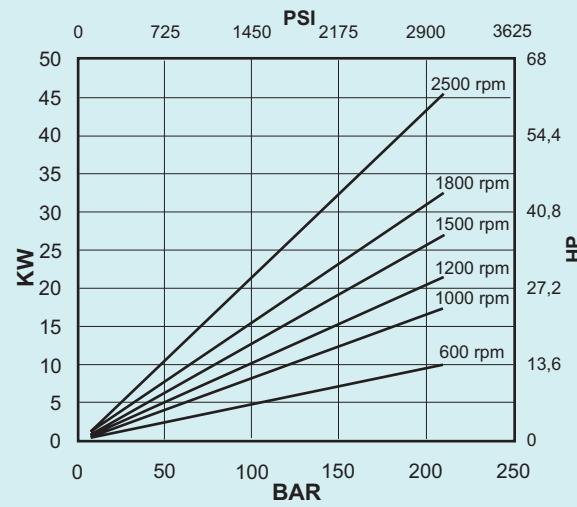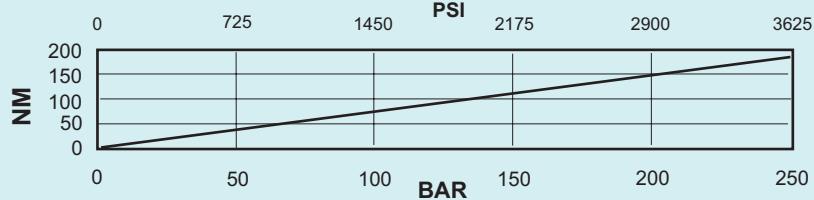**flow / pressure****Cartridge A02-14****power / pressure****input torque / pressure**




Oil viscosity: 25 c.St. (10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR

### Cartridge A02-17

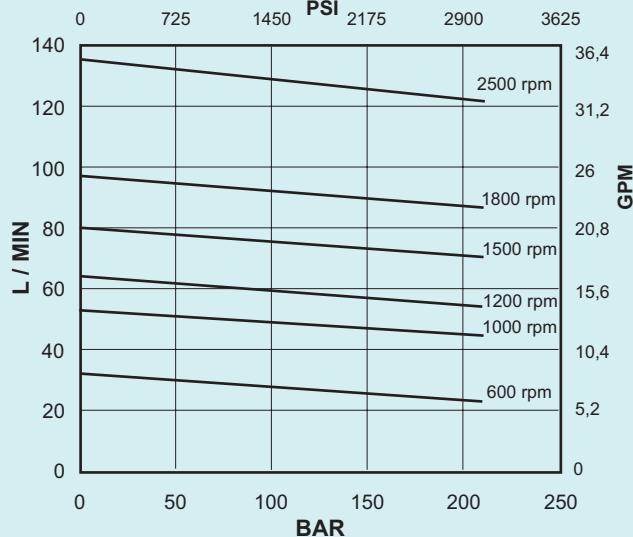
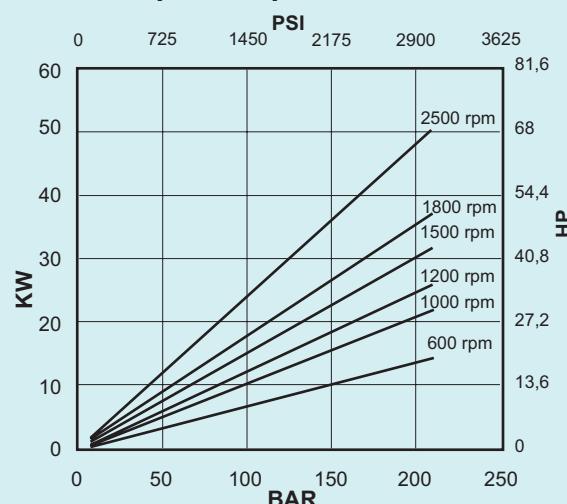
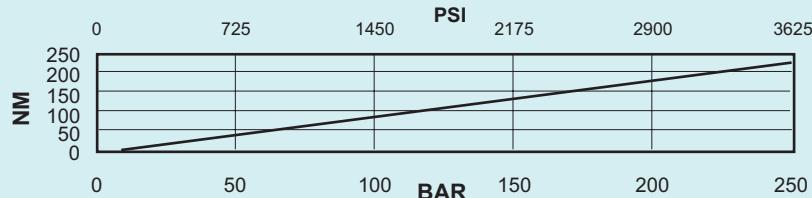
**flow / pressure**

**power / pressure**

**input torque / pressure**

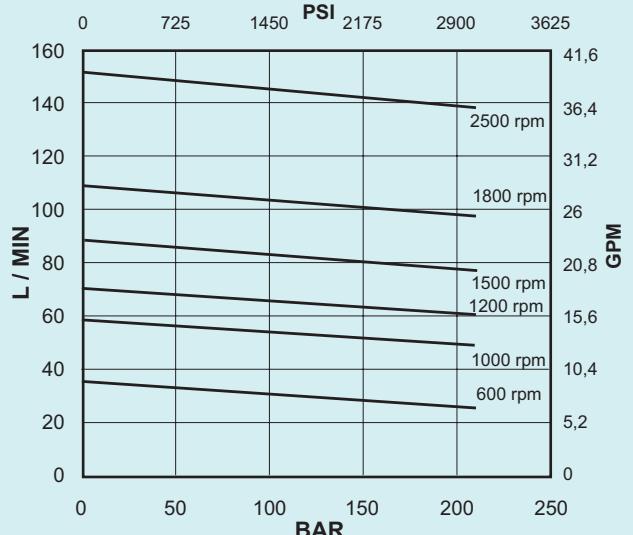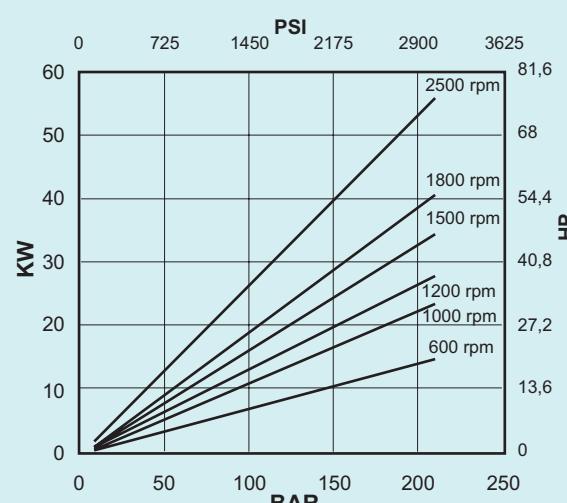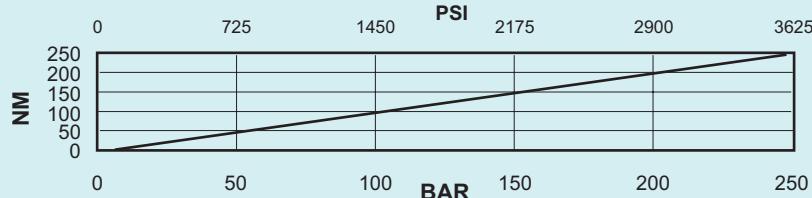
Oil viscosity: 25 c.St. (10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR


### Cartridge A02-19

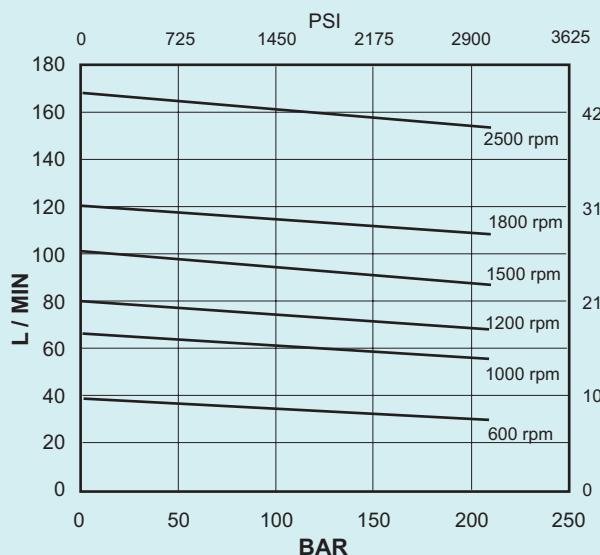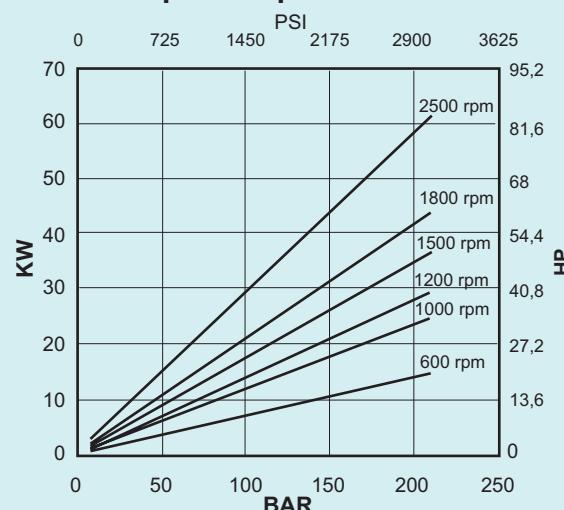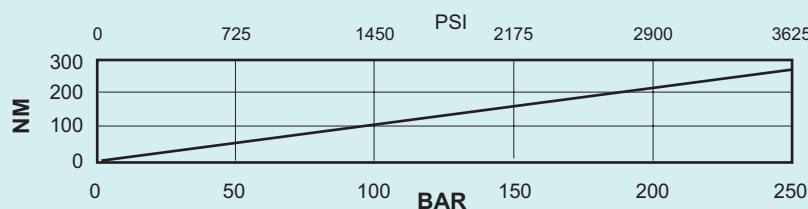**flow / pressure**

**power / pressure**

**input torque / pressure**


Oil viscosity: 25 c.St. (10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR

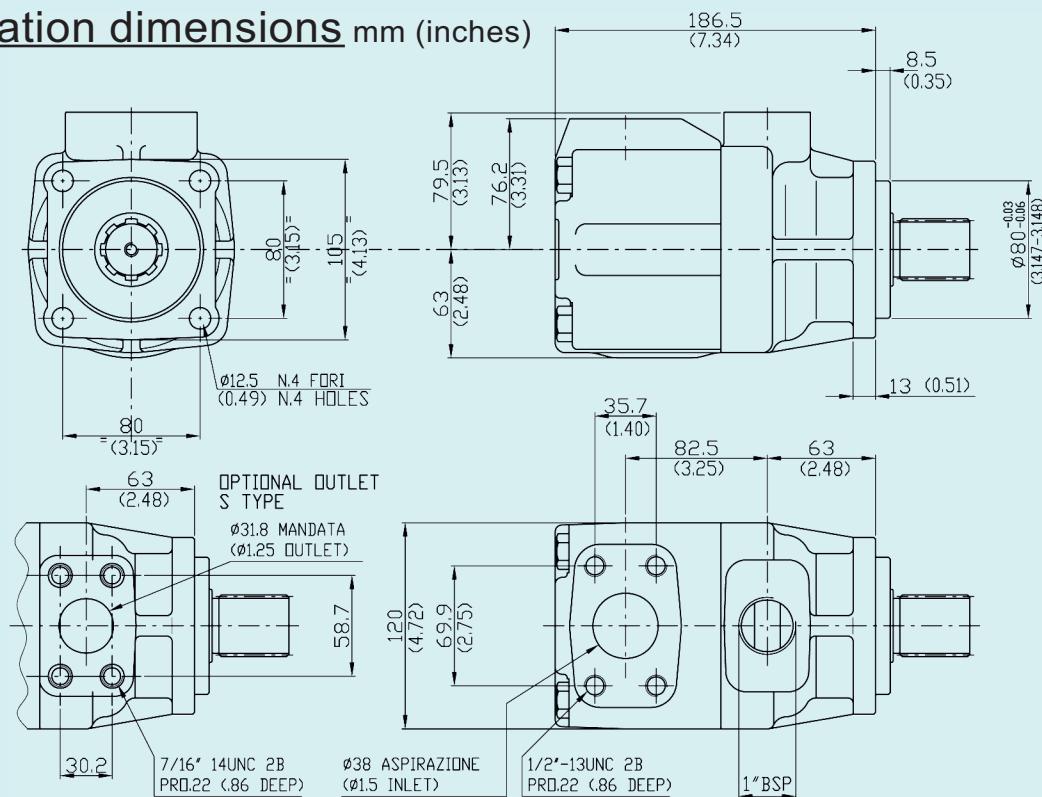**flow / pressure****power / pressure****input torque / pressure**

Oil viscosity: 25 c.St. (10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR

**Installation dimensions mm (inches)**

Approx. weight: 14,8 kg. (33 lbs.)

### Model code breakdown

HQ    02    G    \* \*    \*    \* \*    \*    (L)    (\*)

Pump series

Design

Pump type

Cartridge type

12 14 17 19 21

Outlet port positions

(outlet viewed from cover end)

A = Outlet opposite end

B = Outlet 90° CCW from inlet

C = Outlet inline with inlet

D = Outlet 90° CW from inlet

Shaft end

50 = Splined shaft with ISO 14 four holes flange

Seals

(omit with standard seals and  
shaft-seals in NBR)

V = seals and shaft-seals in  
FPM (Viton®)

Rotation

(viewed from shaft end)

L = left hand rotation CCW

(omit if CW)


Outlet port connection

(omit if GAS threaded )


S = SAE port with 4 holes connection

### Shaft mm (inches)

Shaft  
50

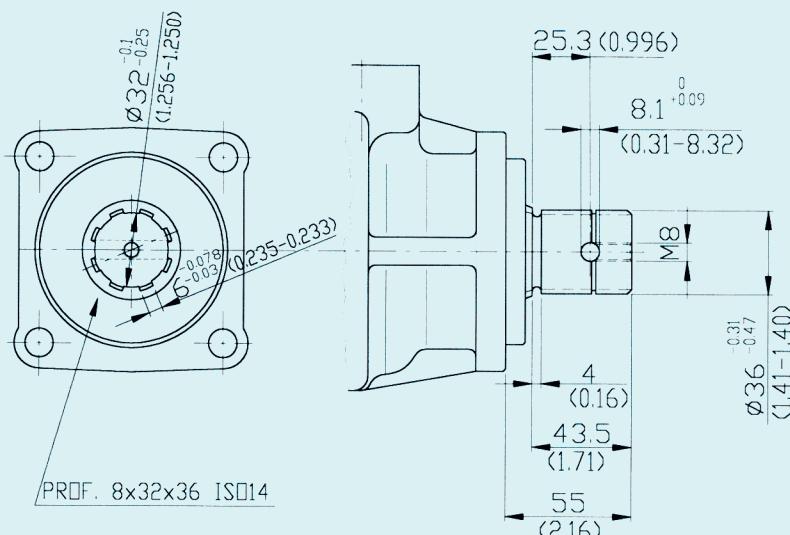

#### PORT ORIENTATIONS

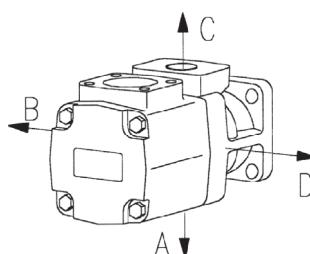

PROF. 8x32x36 ISO14

### Id. codes of pump components


<b>Cartridge</b>		
<b>Series</b>	<b>Model</b>	<b>PART NO.</b>
A02	12	A0212030
	14	A0214070
	17	A0217110
	19	A0219150
A02	21	A0221190
	12	A0212040
	14	A0214080
	17	A0217120
A02	19	A0219160
	21	A0221200

<b>Shaft kit</b>		
<b>Model</b>	<b>PART NO.</b>	
50	M6025000	

<b>Seeger</b>		
<b>PART NO.</b>	<b>M60000010</b>	

<b>Body</b>		
<b>Model</b>	<b>PART NO.</b>	
STD	M8020016	
S	M8020017	

<b>Shaft</b>		
<b>Model</b>	<b>PART NO.</b>	
50	K0250000	

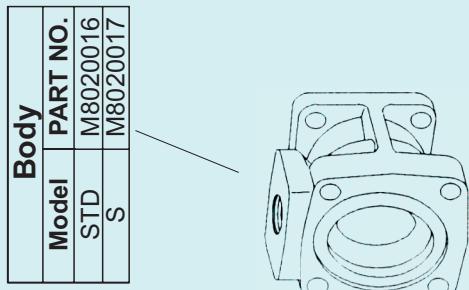

<b>Shaft seal</b>		
<b>PART NO.</b>	<b>Type</b>	
M8020060	NBR	
M8020065	FPM (Viton®)	



<b>Bearing</b>		
<b>PART NO.</b>	<b>M8020030</b>	

<b>Seeger</b>		
<b>PART NO.</b>	<b>M8020050</b>	

<b>Pump seal kit</b>		
<b>PART NO.</b>	<b>Parts</b>	<b>Type</b>
M6025500	seals + 2 shaft seals	NBR
M6025510	seals + 2 shaft seals	FPM (Viton®)

<b>Cover</b>		
<b>PART NO.</b>	<b>M8020020</b>	

<b>Screw</b>		
<b>PART NO.</b>	<b>M8020070</b>	
Torque to 102 Nm (910 lb.in.)		

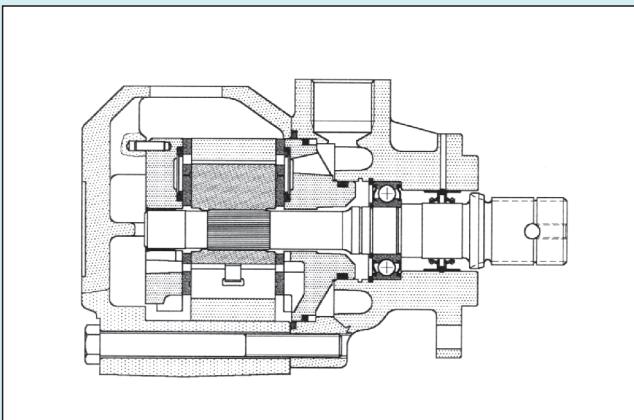

### General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in two different displacements from 75 to 88 l/min (from 20 to 23 gpm) at 1000 rpm and 7 bar.

### Technical characteristics

Cartridge model	Geometric displacement		Rated capacity at 1000 rpm 7 bar		Rated capacity at 1200 rpm 7 bar		Rated capacity at 1500 rpm 7 bar		Maximum pressure with mineral oil		Speed range rpm	
	cm <sup>3</sup> /g (in <sup>3</sup> /r)	l/min (gpm)	l/min (gpm)	l/min (gpm)	l/min (gpm)	bar (psi)	bar (psi)	min	max	min	max	
A03-24	78,3 (4.78)	75,0 (20.0)	90 (24)	115,3 (30.5)	210 (3050)	600	2500					
A03-28	91,2 (5.56)	88,3 (23.3)	106 (28)	131,8 (34.8)	210 (3050)	600	2500					

**Hydraulic fluids:** mineral oils, phosphate ester based fluids.

**Viscosity range (with mineral oil):** from 13 to 860 cSt. (13 to 54 cSt. recommended).



**Filtration:** for the inlet - 149 micron abs., for the return line - 25 micron abs. or better (**with synthetic fluids: for the return line - 10 micron abs. or better**).

**Inlet pressure (with mineral oil):** from -0,17 to +0,35 bar (-2.5 + 5 psi)


**Operating temperature:** with mineral oil -10°C to +70°C (+30°C to +60°C recommended).

**Drive:** direct and coaxial by means of a flexible coupling.




## Main operating data

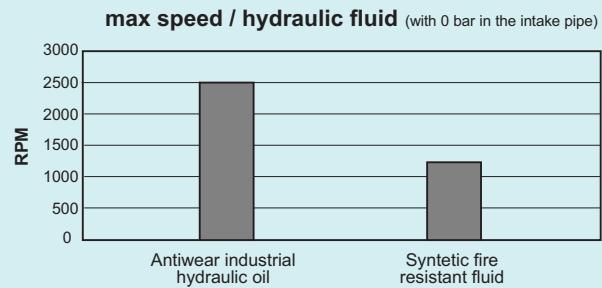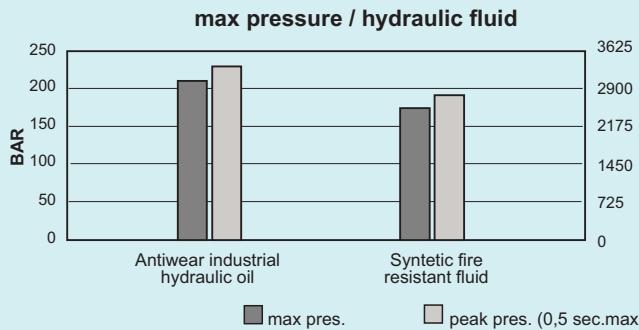


If the intake pressure is not zero bar, use the graph below to find the percentage correction factor to apply to the maximum speed.

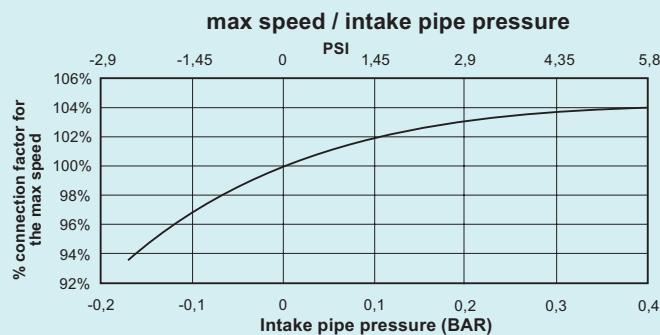


## Cartridge A03-24

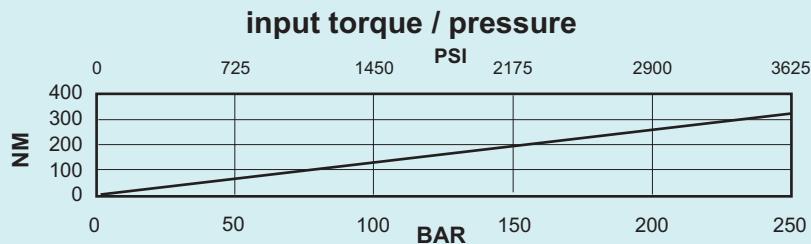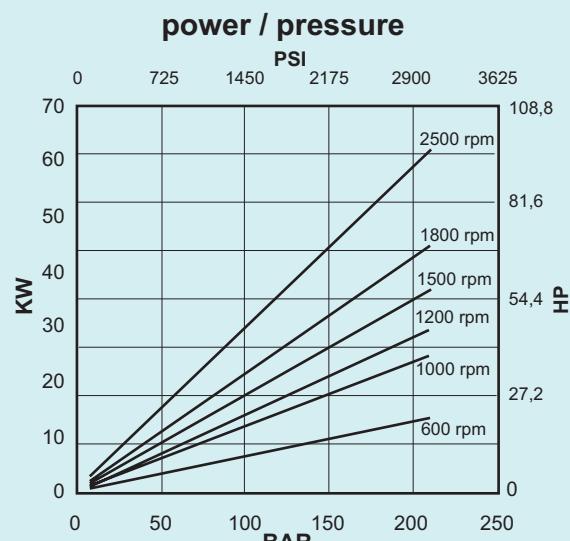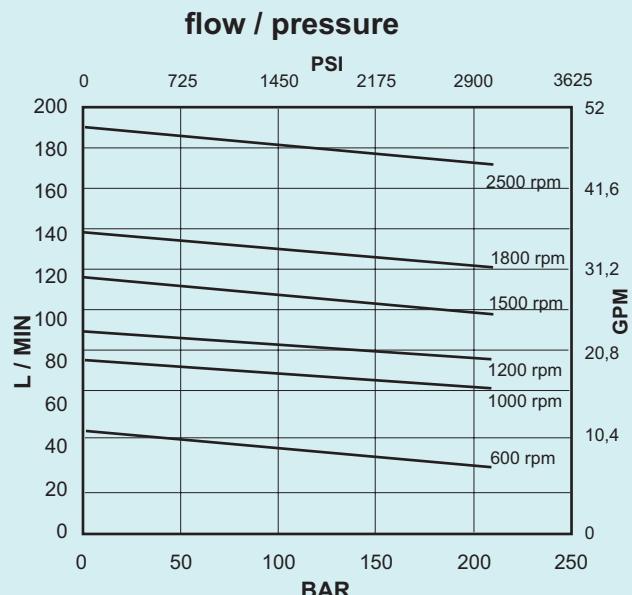

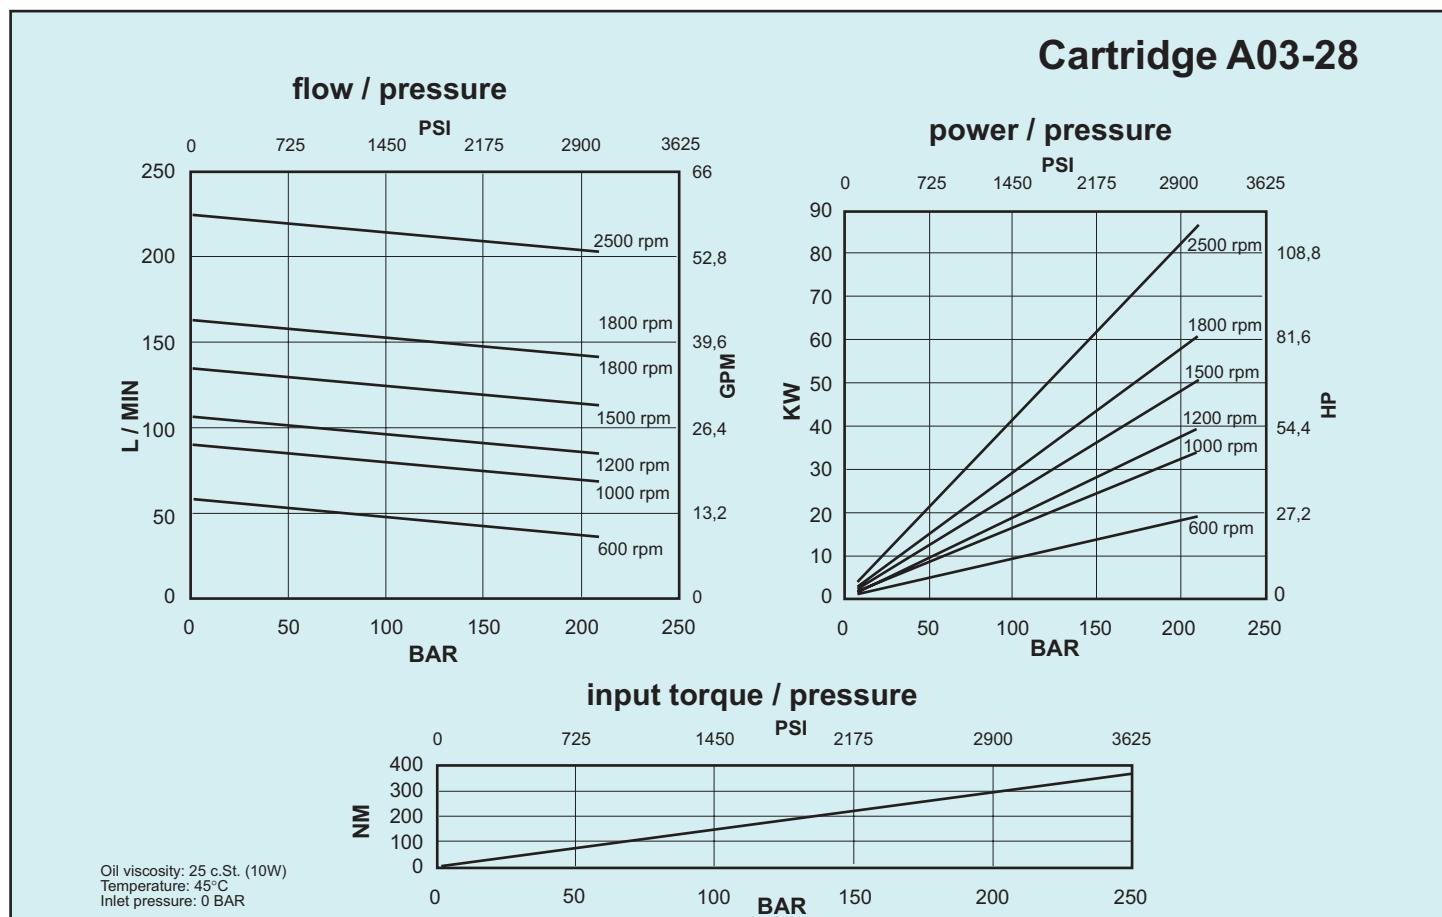

### Installation dimensions mm (inches)

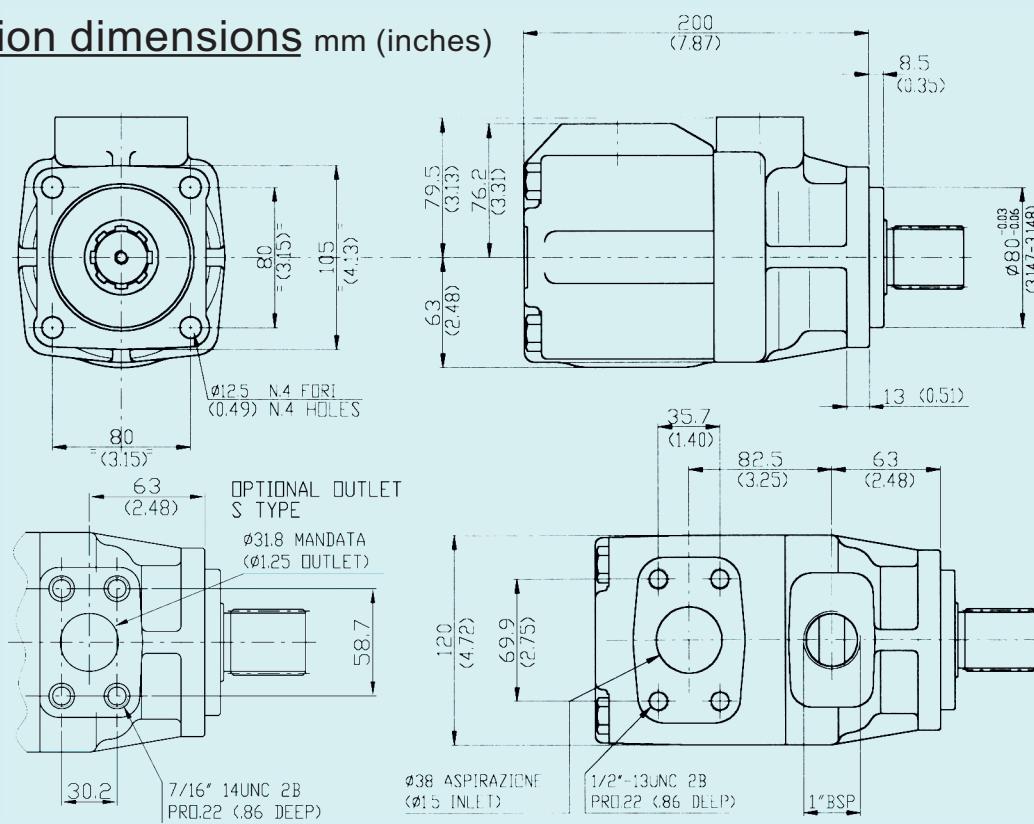

Approx. weight: 17 kg. (37 lbs.)

### Model code breakdown

HQ    03    G    \* \*    \*    \* \*    \*    (L)    (\*)

Pump series

Design

Pump type

Cartridge type

24 28

Outlet port positions

(outlet viewed from cover end)

A = Outlet opposite end

B = Outlet 90° CCW from inlet

C = Outlet inline with inlet

D = Outlet 90° CW from inlet

Shaft end    = Splined shaft with ISO 14 four holes flange  
50

Seals

(omit with standard seals and  
shaft-seals in NBR)

V = seals and shaft-seals in  
FPM (Viton®)

Rotation

(viewed from shaft end)

L = left hand rotation CCW  
(omit if CW)


Outlet port connection

(omit if GAS threaded )


S = SAE port with 4 holes connection

### Shaft mm (inches)

Shaft  
50

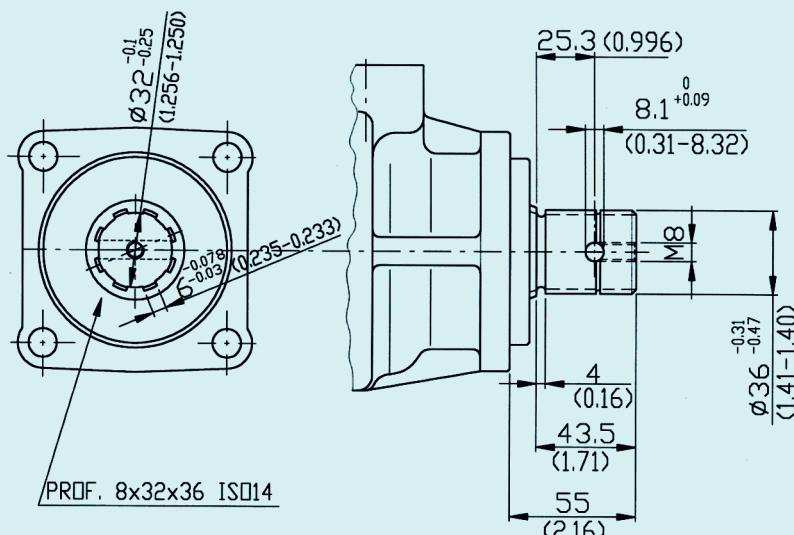




#### PORT ORIENTATIONS

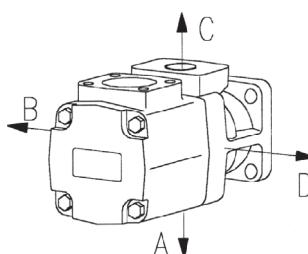

Id. codes of pump components

cartridge		Shaft kit		Shaft seal		Pump seal kit	
Series	Model	PART NO.	PART NO.	Model	PART NO.	PART NO.	PART NO.
A03	24	A0324030	PUMP ROTAT.	50	M6035000	50	M6020030
	28	A0328070	right hand				
A03	24	A0324040					
	28	A0328080	left hand				

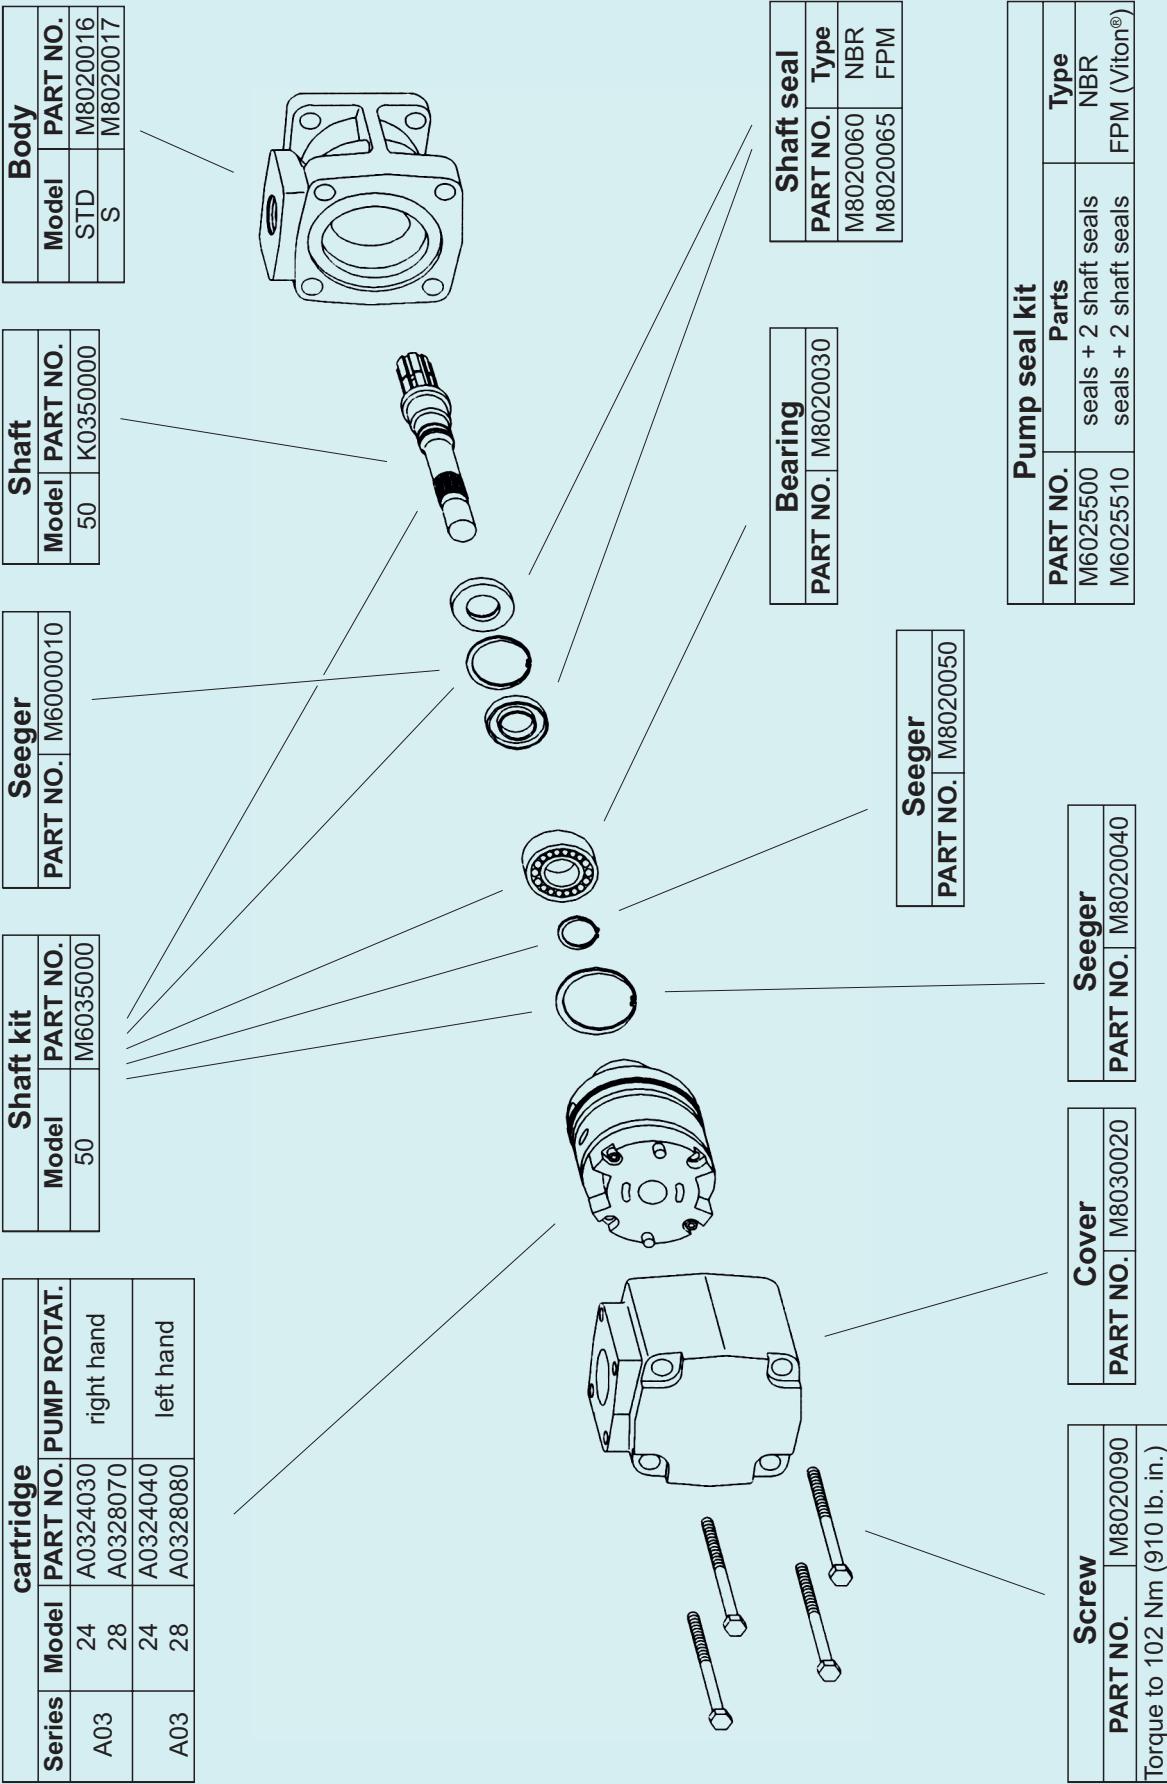

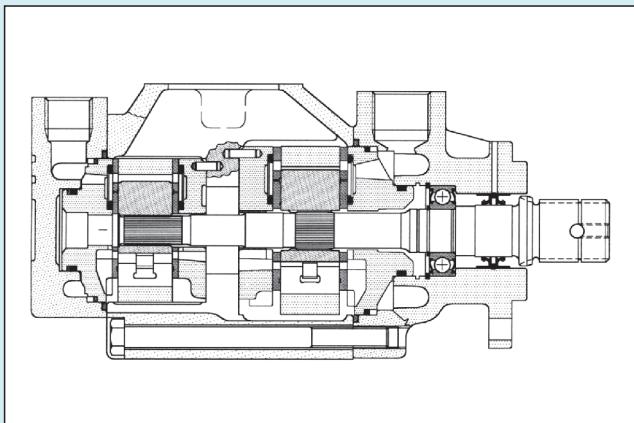

### General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in several versions with rated capacities from 46 to 111 l/min (from 12 to 29 gpm) at 1000 rpm and 7 bar.

### Technical characteristics

Cartridge model	Geometric displacement		Rated capacity at 1000 rpm 7 bar		Rated capacity at 1200 rpm 7 bar		Rated capacity at 1500 rpm 7 bar		Maximum pressure with mineral oil		Speed range rpm	
shaft end	cm³/g	(in³/r)	l/min	(gpm)	l/min	(gpm)	l/min	(gpm)	bar	(psi)	min	max
<b>A02-12</b>	40,1	(2.45)	39,1	(10.0)	46,9	(12)	58,8	(15.5)	210	(3050)	600	2700
<b>A02-14</b>	45,4	(2.77)	43,9	(11.7)	52,7	(14)	65,7	(17.4)	210	(3050)	600	2700
<b>A02-17</b>	55,2	(3.37)	53,5	(14.2)	64,2	(17)	80,2	(21.2)	210	(3050)	600	2500
<b>A02-19</b>	60,1	(3.66)	59,2	(15.8)	71,1	(19)	88,7	(23.4)	210	(3050)	600	2500
<b>A02-21</b>	67,5	(4.12)	65,8	(17.5)	79,3	(21)	99,8	(26.4)	210	(3050)	600	2500
cover end	cm³/g	(in³/r)	l/min	(gpm)	l/min	(gpm)	l/min	(gpm)	bar	(psi)	min	max
<b>A01-02</b>	7,2	(0.44)	6,9	(1.7)	8,3	(2)	10,4	(2.8)	210	(3050)	600	2700
<b>A01-05</b>	18,1	(1.10)	17,3	(4.2)	20,8	(5)	26,1	(6.9)	210	(3050)	600	2700
<b>A01-08</b>	27,4	(1.67)	26,5	(6.7)	31,8	(8)	39,4	(10.4)	210	(3050)	600	2700
<b>A01-09</b>	30,1	(1.83)	29,2	(7.5)	35,1	(9)	44,1	(11.7)	210	(3050)	600	2700
<b>A01-11</b>	36,4	(2.22)	35,3	(9.2)	42,4	(11)	52,6	(13.9)	210	(3050)	600	2700
<b>A01-12</b>	39,5	(2.41)	39,1	(10.0)	46,9	(12)	58,7	(15.5)	160	(2300)	600	2700
<b>A01-14</b>	45,9	(2.79)	45,8	(11.7)	54,9	(14)	69,6	(18.4)	140	(2030)	600	2700

**Hydraulic fluids:** mineral oils, phosphate ester based fluids.

**Viscosity range (with mineral oil):** from 13 to 860 cSt. (13 to 54 cSt. recommended).



**Filtration:** for the inlet - 149 micron abs., for the return line - 25 micron abs. or better (**with synthetic fluids:** for the return line - 10 micron abs. or better).

**Inlet pressure (with mineral oil):** from -0,17 to +0,35 bar (-2.5 + 5 psi)


**Operating temperature:** with mineral oil -10°C to +70°C (+30°C to +60°C recommended).

**Drive:** direct and coaxial by means of a flexible coupling.




## Main operating data

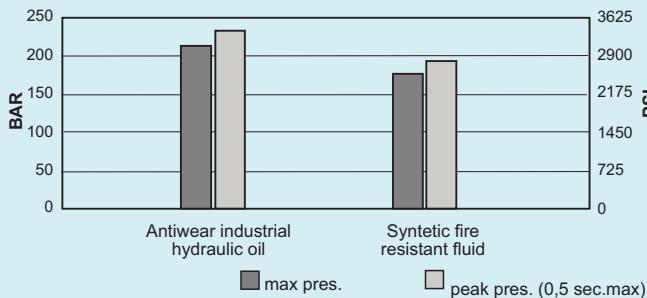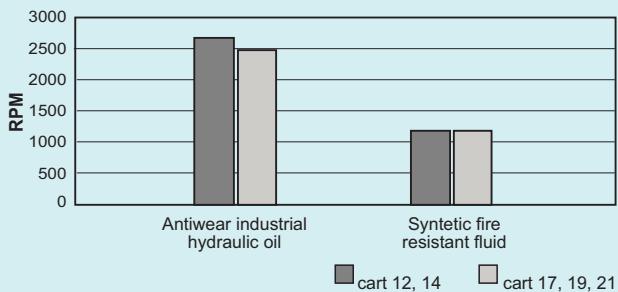**max pressure / hydraulic fluid**

**max speed / hydraulic fluid (with 0 bar in the intake pipe)**

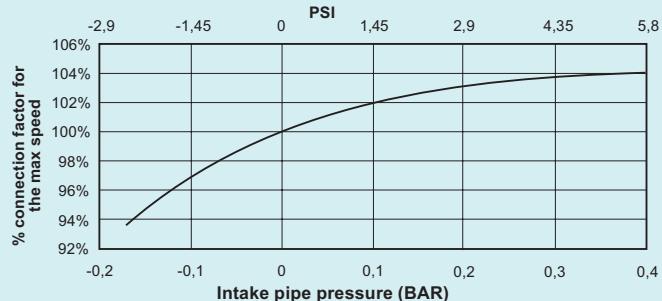
If the intake pressure is not zero bar, use the graph below to find the percentage correction factor to apply to the maximum speed.


**max speed / intake pipe pressure**

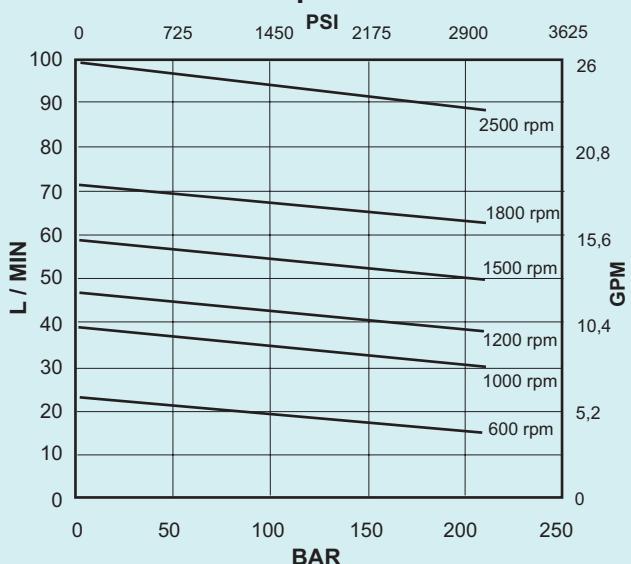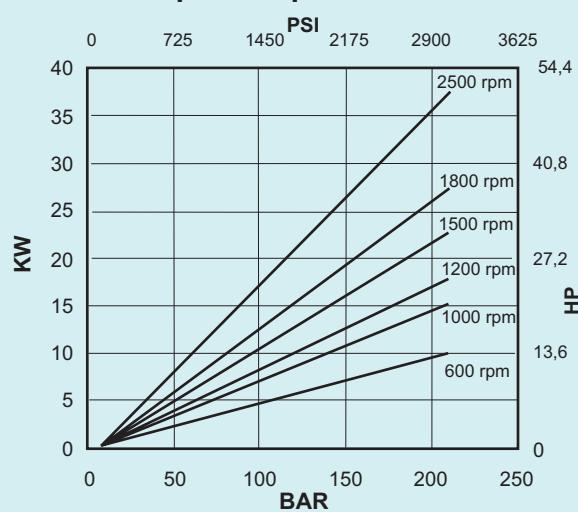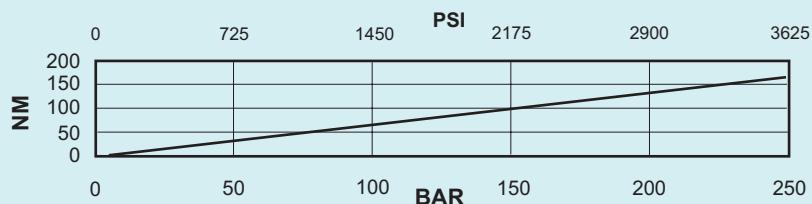
## Shaft end cartridge A02-12


**flow / pressure**

**power / pressure**

**input torque / pressure**

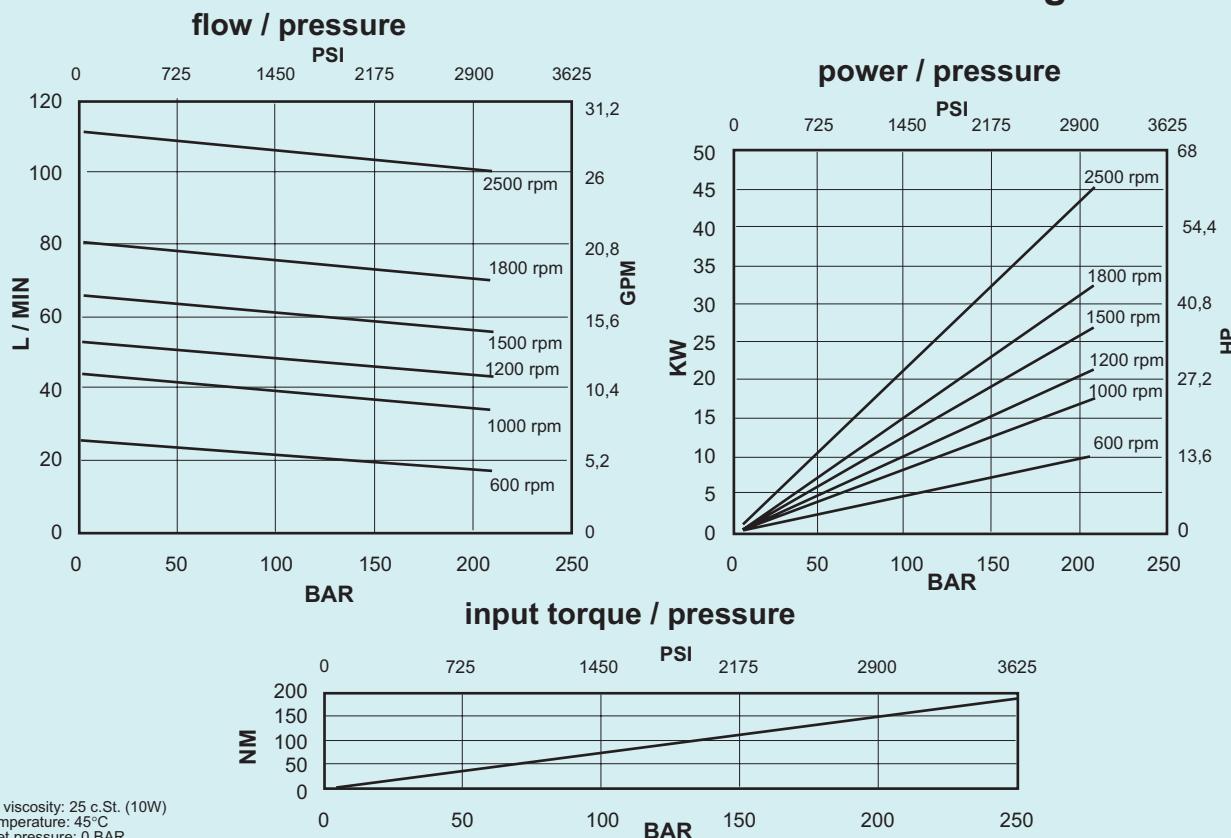
Oil viscosity: 25 c.St. (10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR


### Shaft end cartridge A02-14

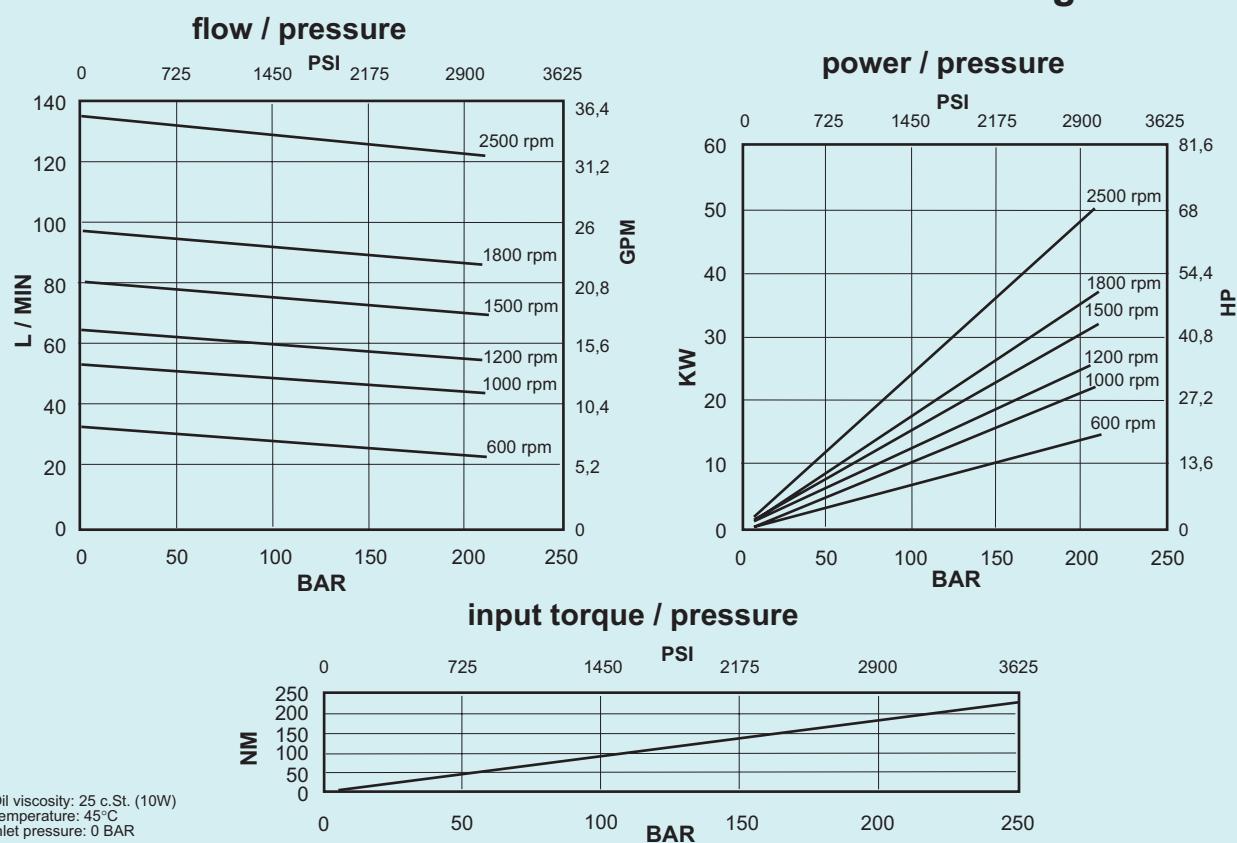


### Shaft end cartridge A02-17






### Shaft end cartridge A02-19



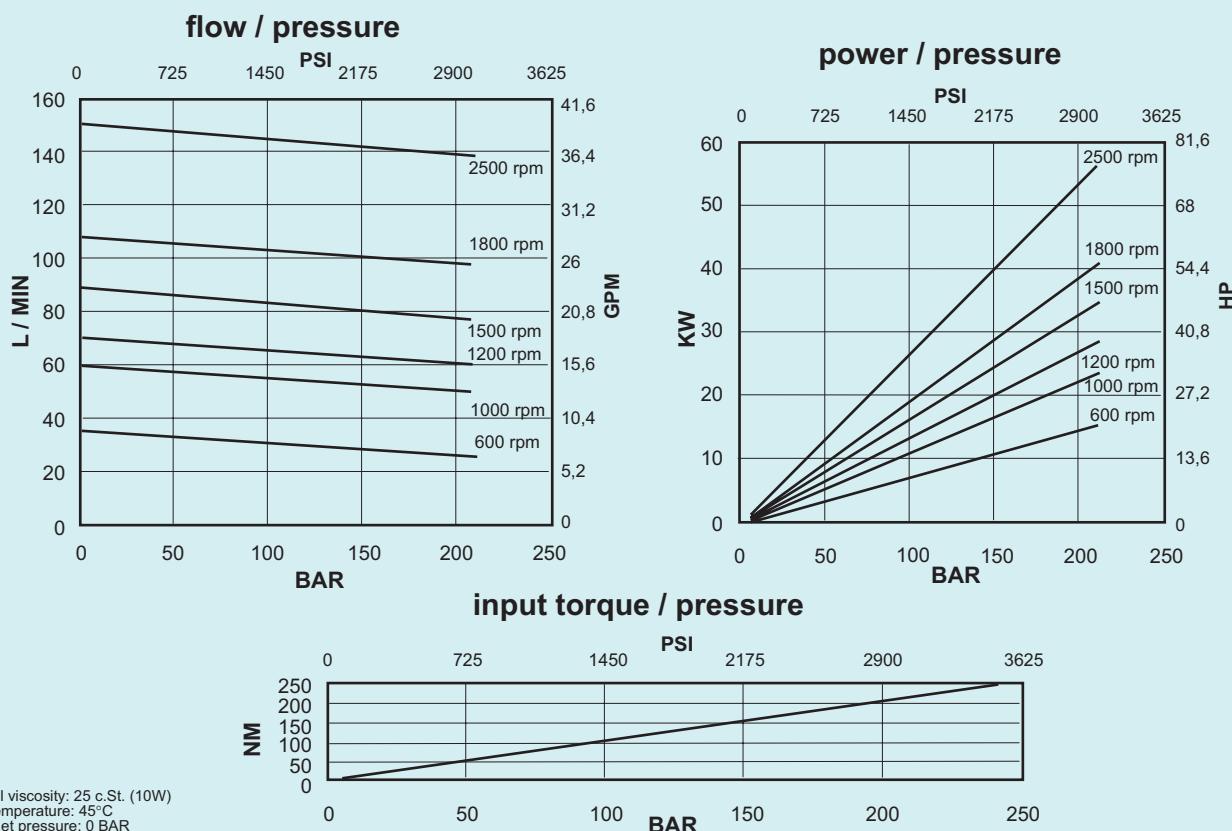


### Shaft end cartridge A02-21

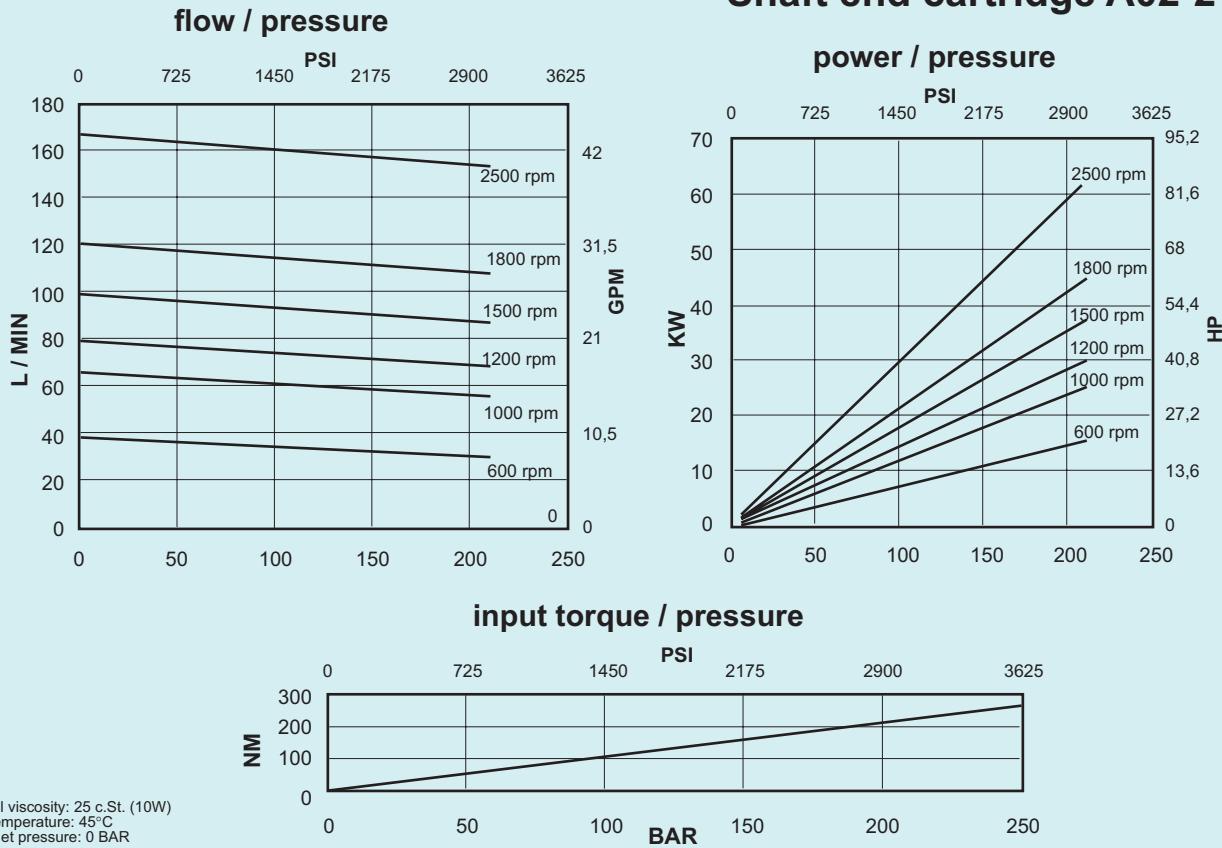

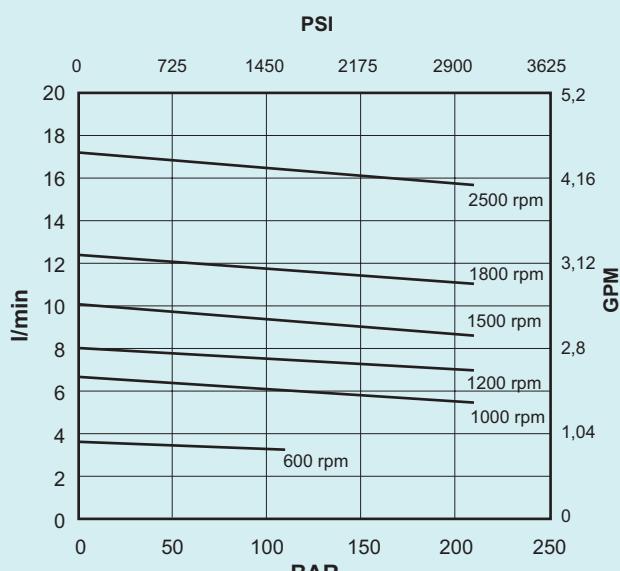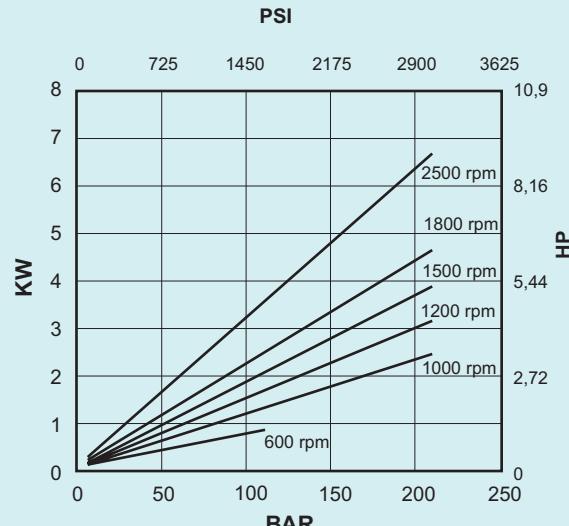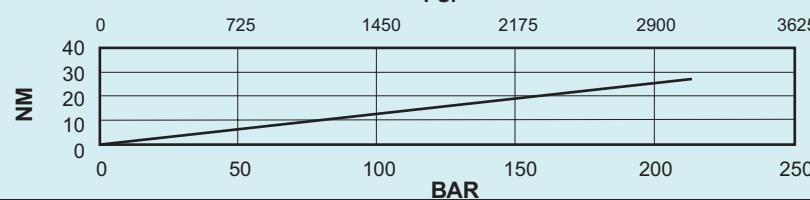
**flow / pressure****Cover end cartridge A01-02****power / pressure****input torque / pressure**

Oil viscosity: 25 c.St.(10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR

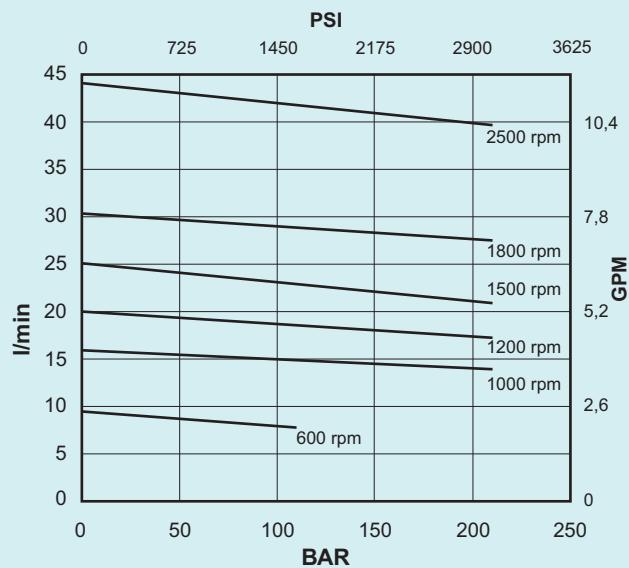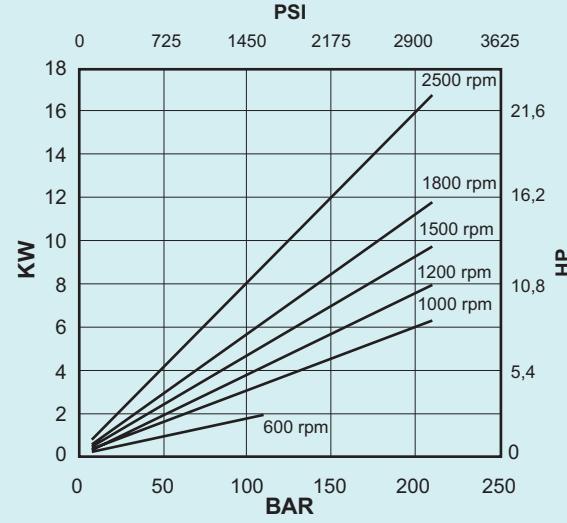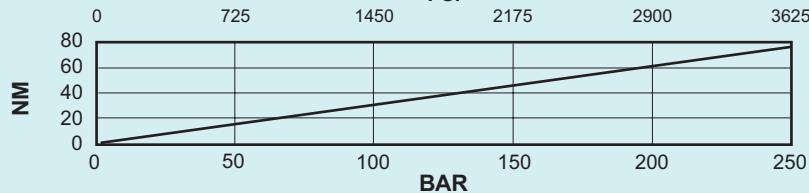
**flow / pressure****Cover end cartridge A01-05****power / pressure****input torque / pressure**

Oil viscosity: 25 c.St.(10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR


### Cover end cartridge A01-08

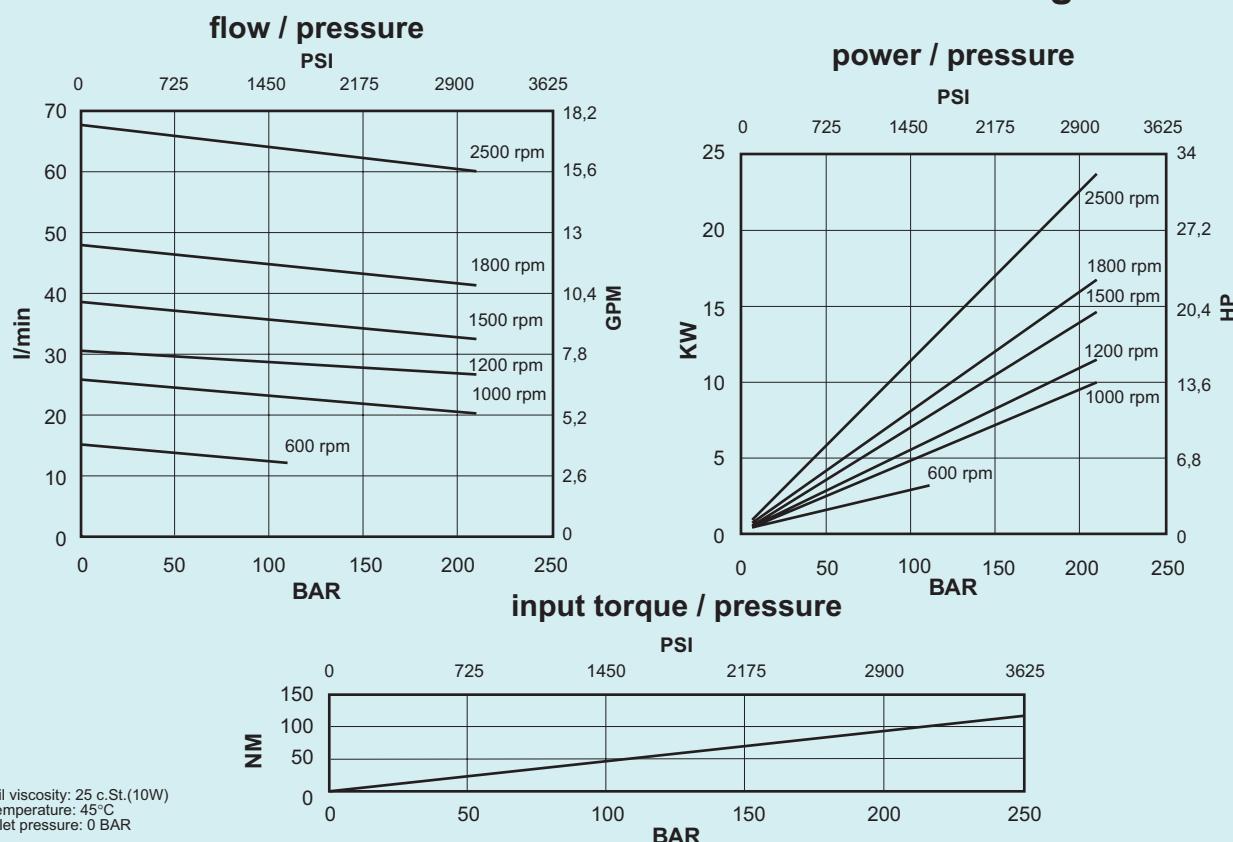


### Cover end cartridge A01-09

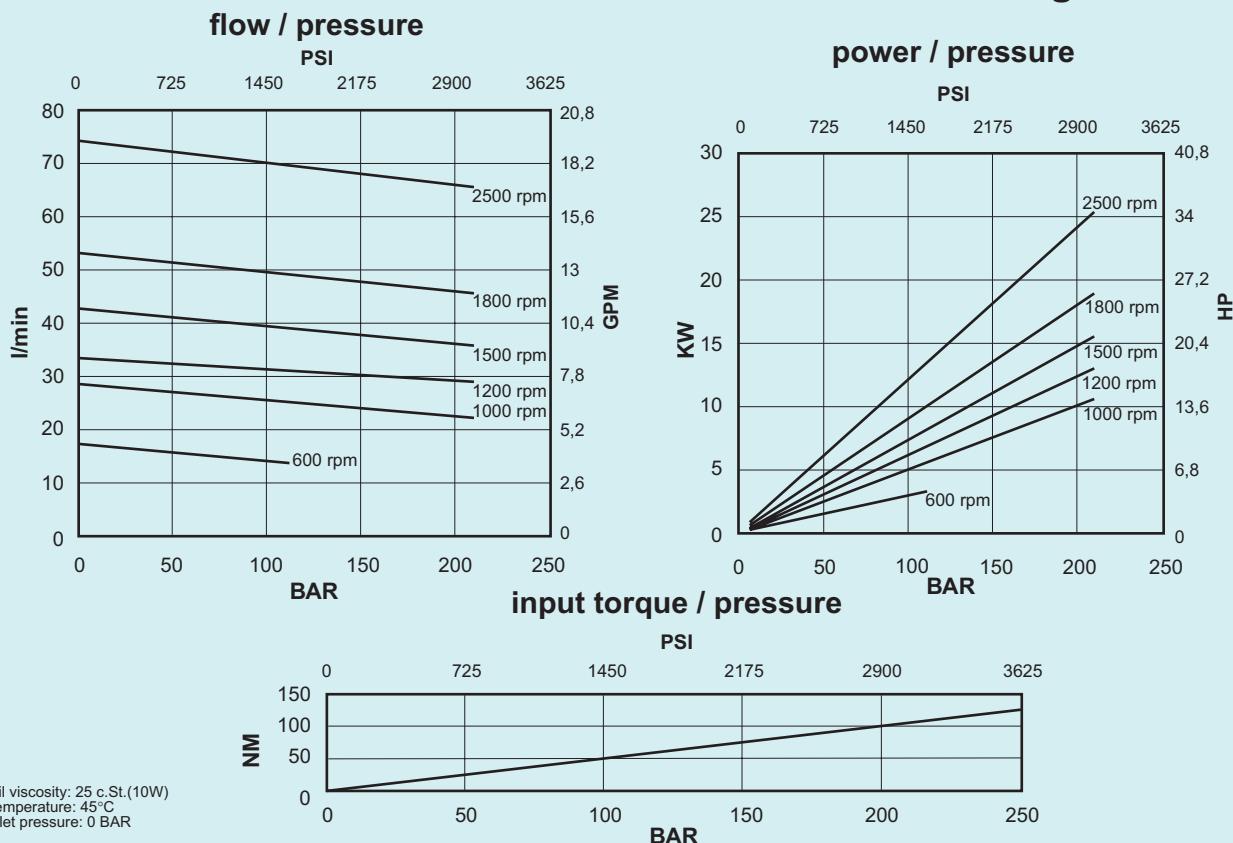


### Cover end cartridge A01-11

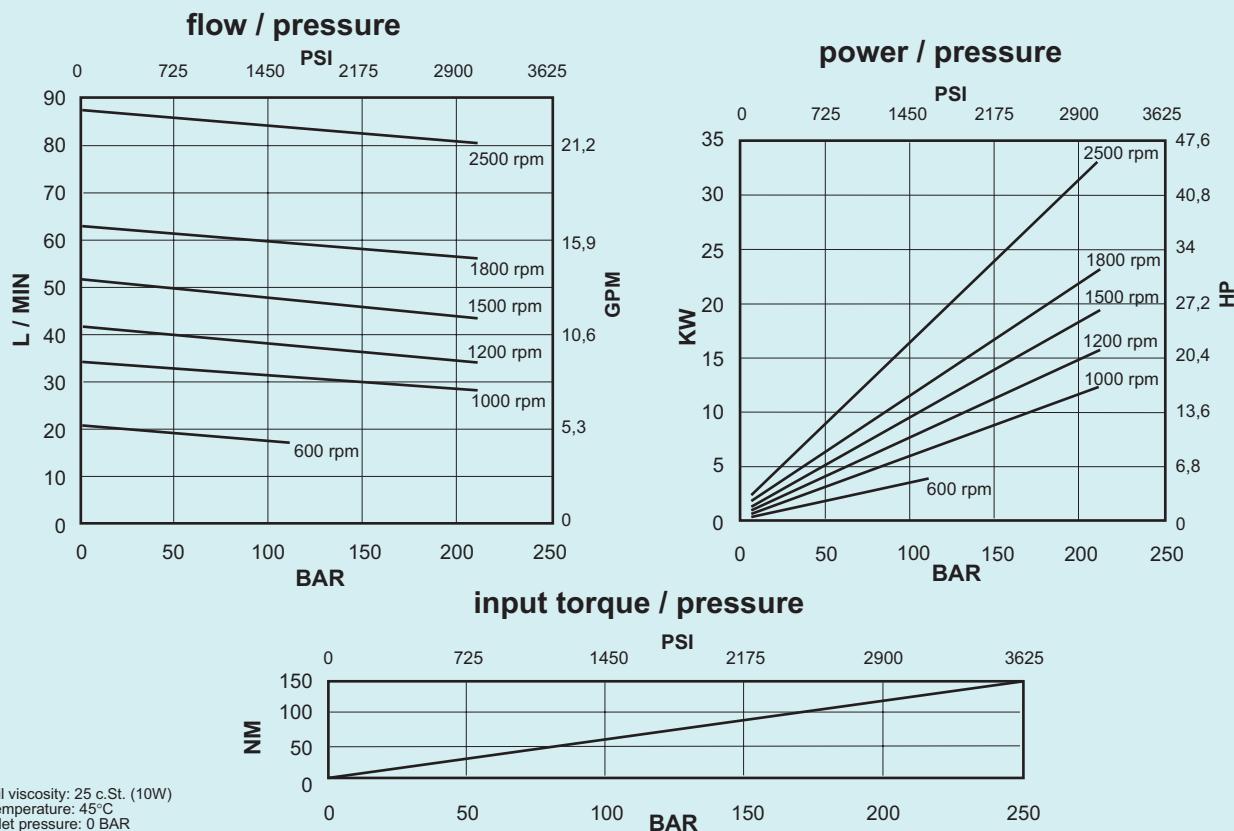


### Cover end cartridge A01-12

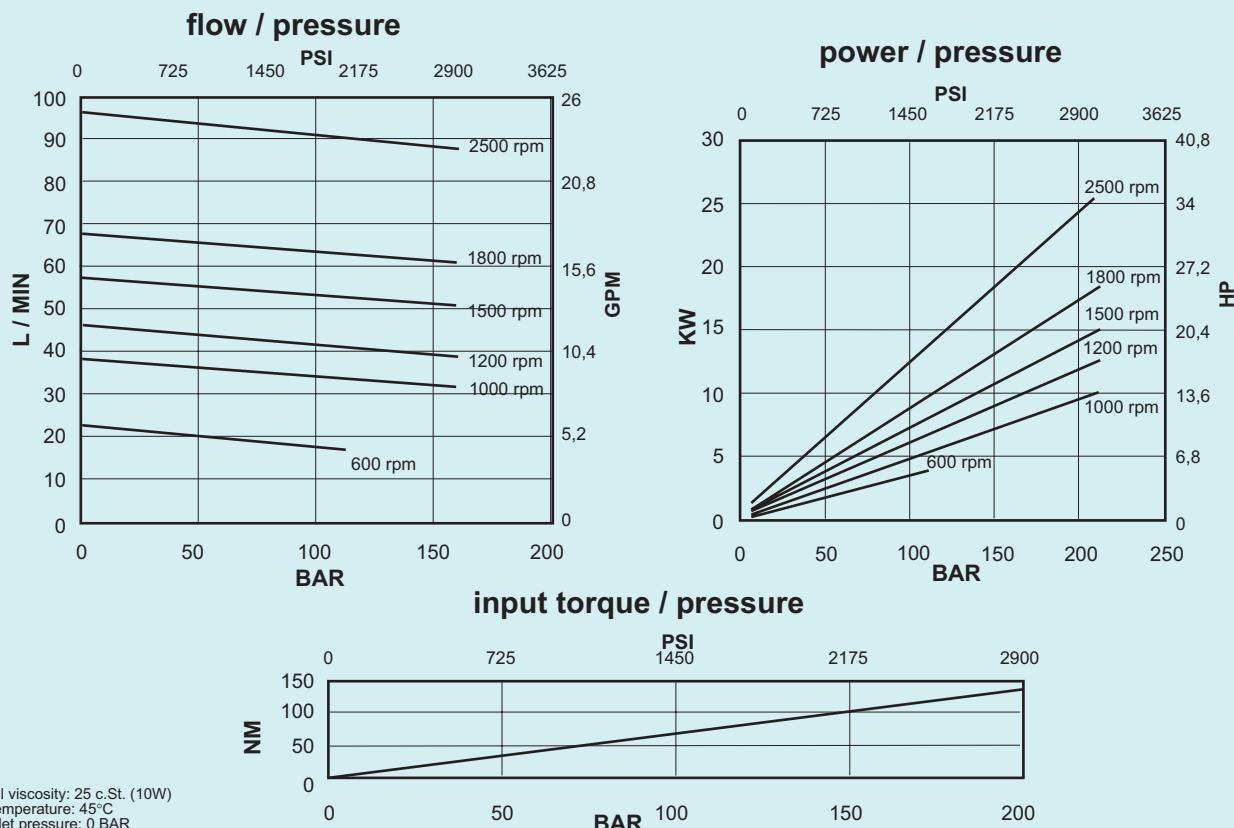

### Cover end cartridge A01-14

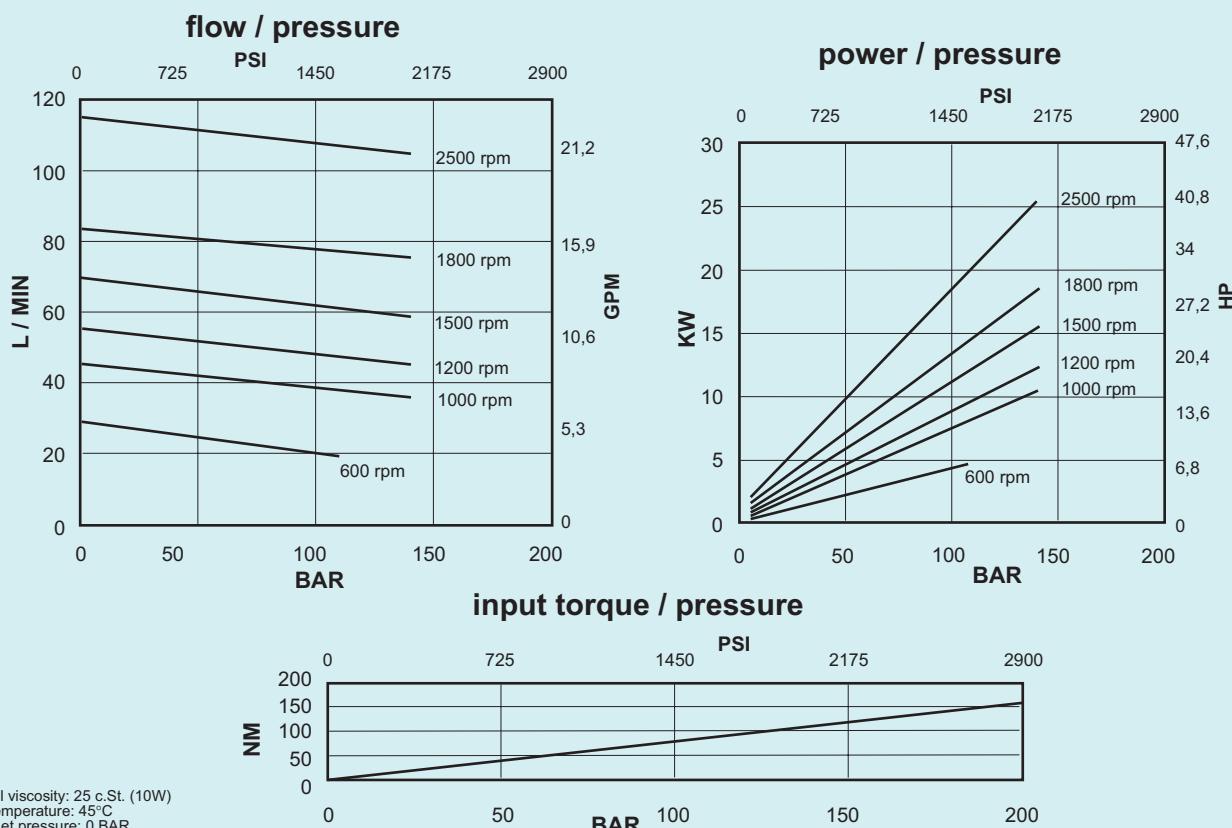

### Installation dimensions mm (inches)

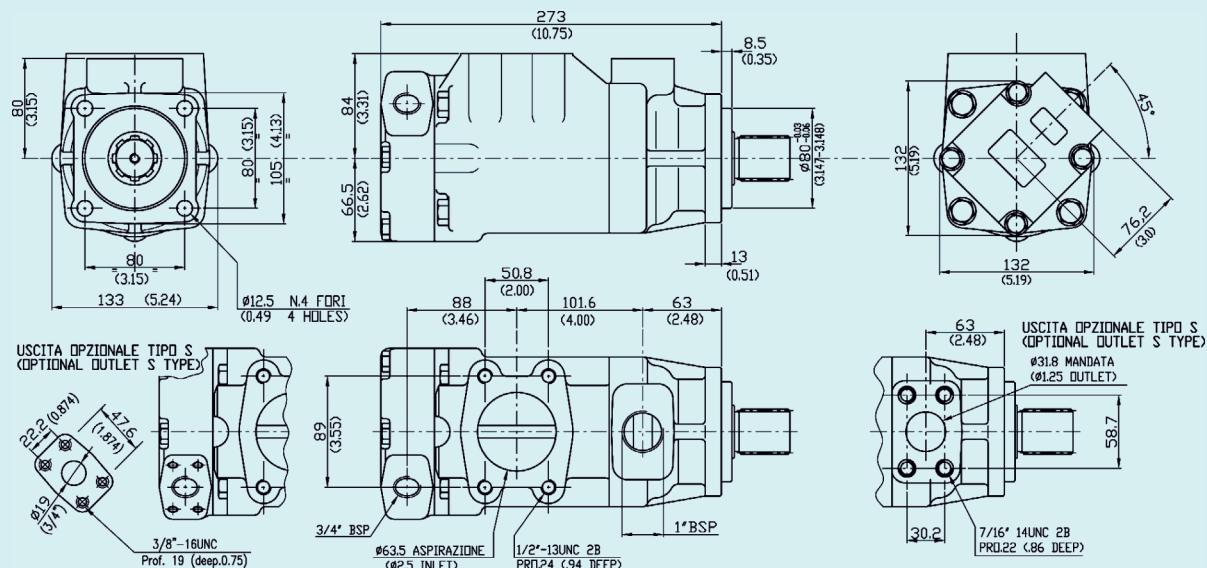

Approx. weight: 20,5 kg. (45 lbs.)

Model code breakdown

HQ    21    G    \* \*    \* \*    \* \*    \*    (L)    (\*)

Pump series

Pump type

Cartridge types

- shaft end 12 14 17 19 21

- cover end 02 05 08 09 11 12 14

Body outlet port positions

(outlet viewed from cover end)

A = Outlet opposite end

B = Outlet 90° CCW from inlet

C = Outlet in line with inlet

D = Outlet 90° CW from inlet

Cover outlet port positions

(outlet viewed from cover end)

A = Outlet 135° CCW from inlet

B = Outlet 45° CCW from inlet

C = Outlet 45° CW from inlet

D = Outlet 135° CW from inlet

Design

Seals

(omit with standard seals and shaft-seals in NBR)

V = seals and shaft-seals in FPM (Viton®)

Rotation

(viewed from shaft end)

L = left hand rotation CCW

(omit if CW)

Outlet port connection



(omit if GAS threaded )

S = SAE port with 4 holes connection

Shaft end


Shaft mm (inches)


Shaft  
50

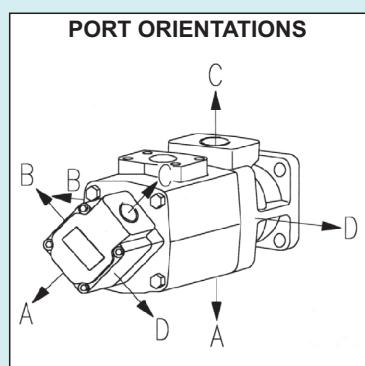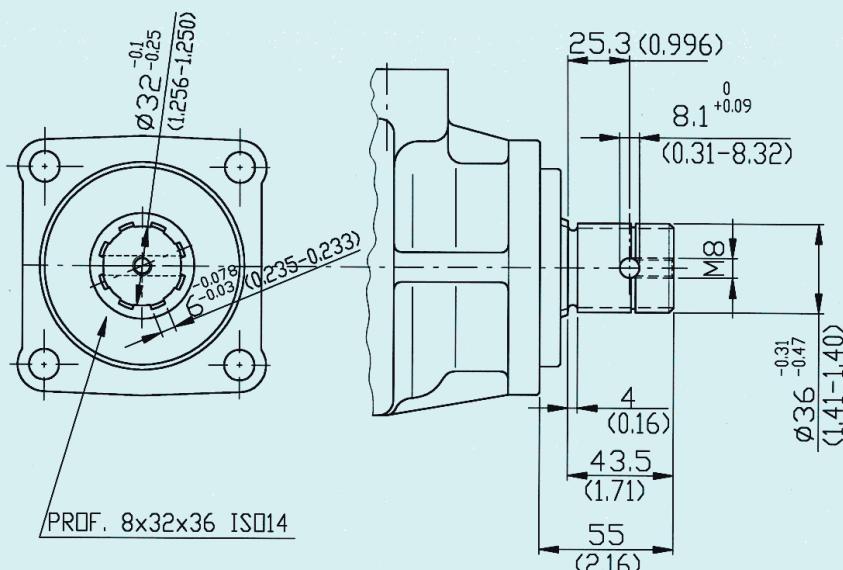

## Id. codes of pump components

Cartridges					
	Cover end	Shaft end	Pump rotation		
Series	Model	Part No.	Series	Model	Part No.
A01	02	A0102000	12	A0212030	
	05	A0105010	14	A0214070	
	08	A0108030	17	A0217110	
	09	A0109050	19	A0219150	right hand
	11	A0111070	21	A0221190	
	12	A0112090			
A01	14	A0114110			
	02	A0102005	12	A0212040	
	05	A0105020	14	A0214080	
	08	A0108040	17	A0217120	
	09	A0109060	19	A0219160	left hand
	11	A0111080	21	A0221200	
A01	12	A0112100			
	14	A0114120			

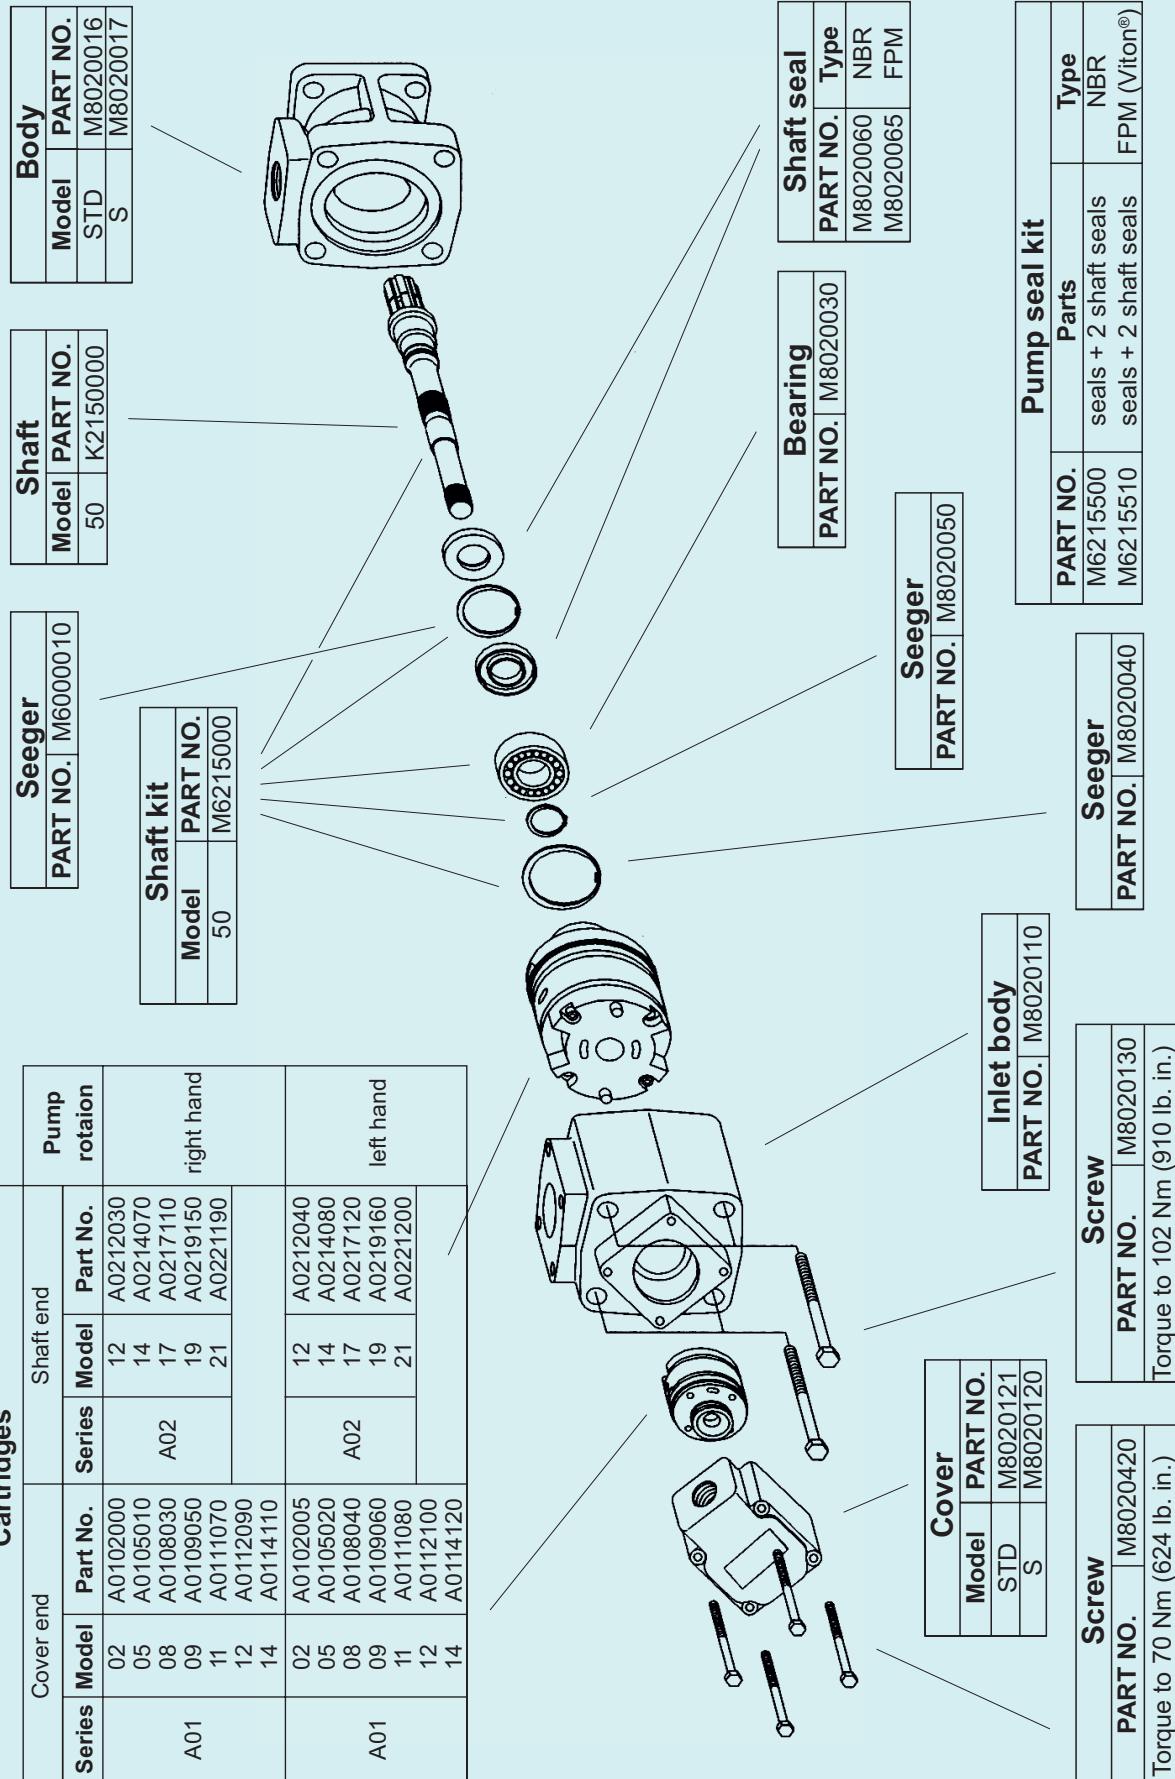

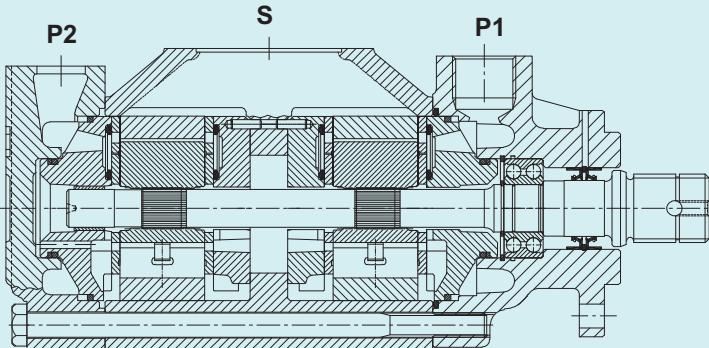

### General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in several versions with rated capacity from 52 to 131 l/min (from 14 to 35 gpm) at 1000 rpm and 7 bar pressure.

### Technical characteristics (P1 and P2 sections)

Cartridge model	Geometric displacement		Rated capacity at 1000 rpm 7 bar		Rated capacity at 1500 rpm 7 bar		Maximum pressure with mineral oil		Speed range rpm	
	cm <sup>3</sup> /g (in <sup>3</sup> /r)	l/min (gpm)	l/min	(gpm)	l/min	(gpm)	bar	(psi)	min	max
A02-08	27,0 (1.64)	26,1 (6.9)	39,1 (10)	(10)	210 (3050)	600 2700				
A02-12	40,1 (2.45)	39,1 (10)	58,8 (15.5)	(15.5)	210 (3050)	600 2700				
A02-14	45,4 (2.77)	43,9 (11.7)	65,7 (17.4)	(17.4)	210 (3050)	600 2700				
A02-17	55,2 (3.37)	53,5 (14.2)	80,2 (21.2)	(21.2)	210 (3050)	600 2500				
A02-19	60,0 (3.66)	59,2 (15.8)	88,7 (23.4)	(23.4)	210 (3050)	600 2500				
A02-21	67,5 (4.12)	65,8 (17.5)	99,8 (26.4)	(26.4)	210 (3050)	600 2500				

**Hydraulic fluids:** antiwear high quality mineral oils or fluid based on phosphate ester.

**Viscosity range:** (with mineral oil) from 13 to 860 cSt. (13 to 54 cSt. recommended).

**Filtration:** for the inlet - not less than 149 micron abs., for the return line - 25 micron abs. or smaller (with synthetic fluids: for the return line - 10 micron abs. or smaller).


**Inlet pressure:** (with mineral oil): from -0,17 to +1,4 bar (-2.5 to + 20 psi)

**Operating temperature:** with mineral oil -10°C +70°C (+30°C to +60°C recommended), with water based fluids +15°C to +50°C.


**Drive:** direct and coaxial by means of a flexible coupling.

## Main operating data

### max pressure / fluid type

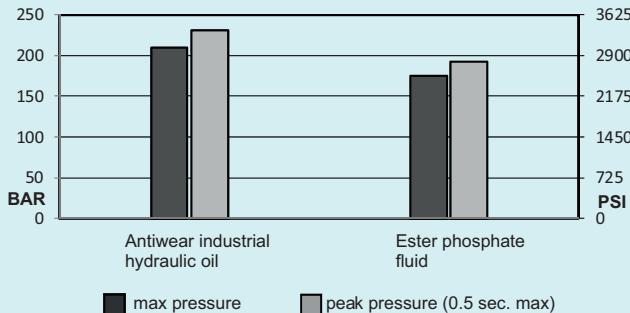


### max speed / fluid type

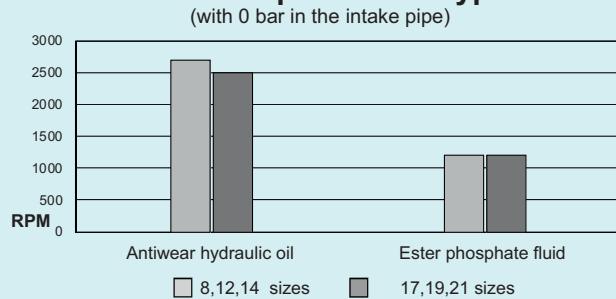


### sound level for each section

at 138 bar (2000 psi), cart. A02-17

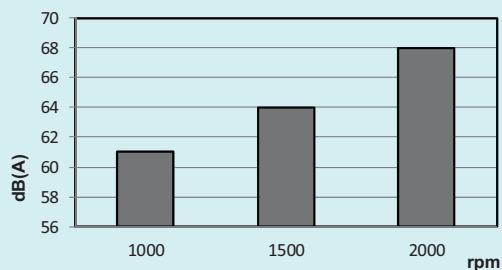


If the intake pressure is not zero bar, use the graph below to find the percentage correction factor to apply to the maximum speed

### max speed / intake pipe pressure

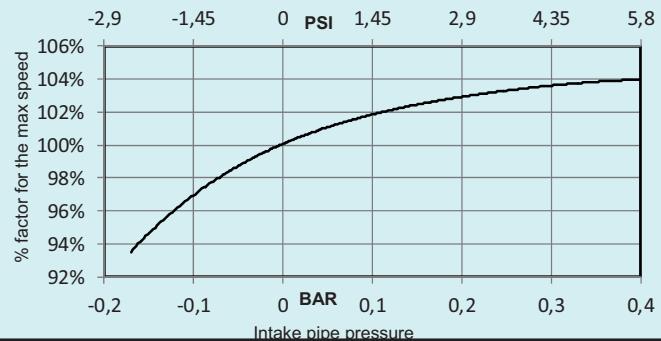

## Installation dimensions mm [inches]

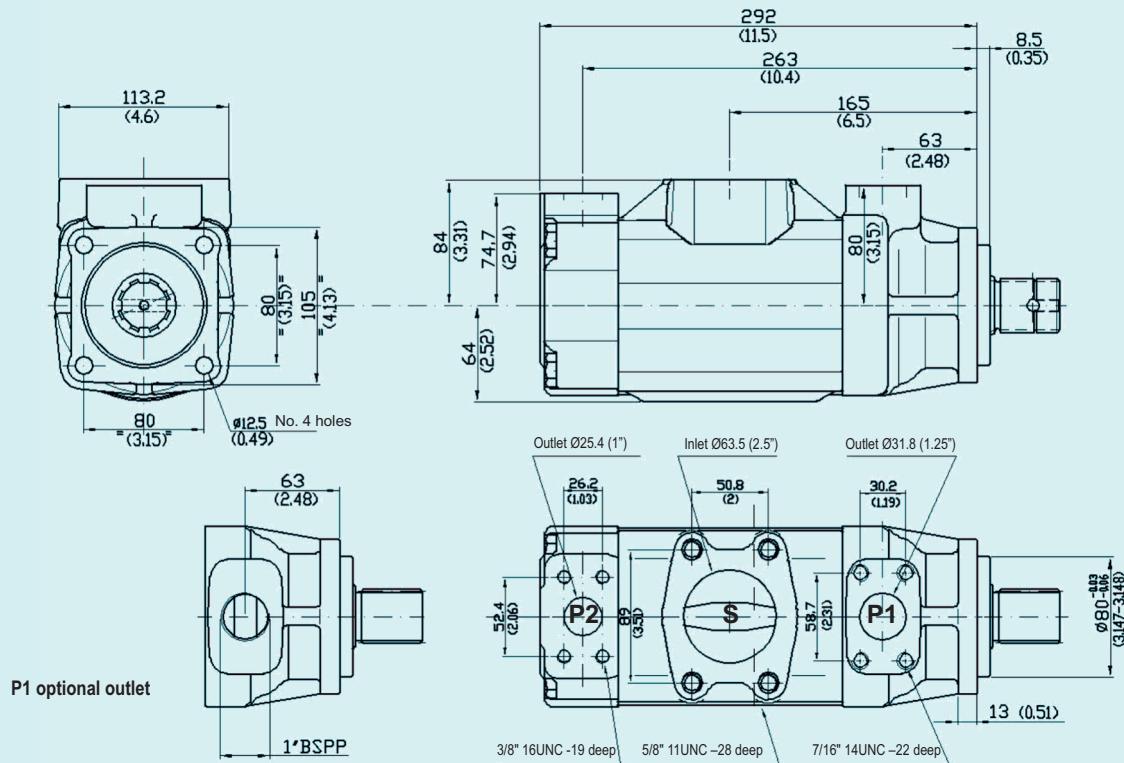

Approx. weight: 22 Kg (63 lbs)

Ports standard version: B


Model code breakdown

<b>HQ</b>	<b>22</b>	<b>G</b>	<b>**</b>	<b>**</b>	<b>*</b>	<b>*</b>	<b>**</b>	<b>*</b>	<b>*</b>	<b>*</b>	<b>*</b>
Pump series											
Pump type		<b>Design</b>									
Cartridge model (P1 and P2 sections)	<b>08</b>	<b>12</b>	<b>14</b>	<b>17</b>	<b>19</b>	<b>21</b>					
Body outlet port positions (outlet viewed from cover-end)											
A = Outlet opposite end											
B = Outlet 90°CCW from inlet											
C = Outlet inline with inlet											
D = Outlet 90°CW from inlet											
Cover outlet port positions (outlet viewed from cover-end)											
A = Outlet opposite end											
B = Outlet 90°CCW from inlet											
C = Outlet inline with inlet											
D = Outlet 90°CW from inlet											
Shaft end options											
<b>50</b> = Splined shaft with 4 holes flange ISO 14											


Shaft options

mm [inches]

## Type 50

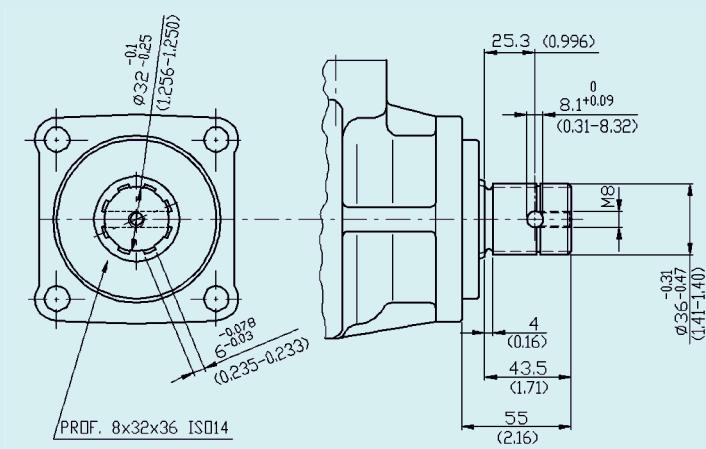

## Outlet orientations

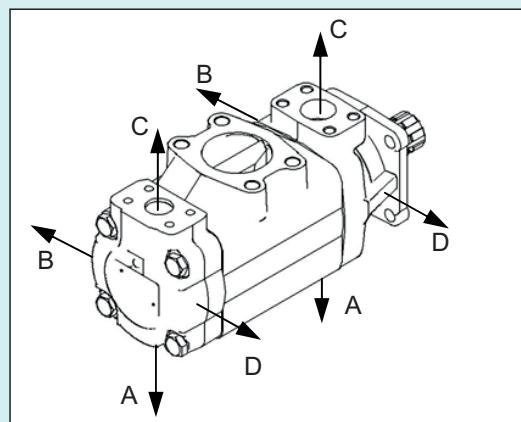


### Id. codes of pump components

Cartridges			
Series	Model	Part No.	Pump rotation
		cover end shaft end	shaft end
A02	8	A0208347	A0208320
	12	A0212047	A0212020
	14	A0214087	A0214060
	17	A0217127	A0217100
	19	A0219167	A0219140
	21	A0221207	A0221180
A02	8	A0208337	A0208310
	12	A0212037	A0212010
	14	A0214077	A0214050
	17	A0217117	A0217090
	19	A0219157	A0219130
	21	A0221197	A0221170

Seeger	
Part No.	M60000010

Shaft kit	
Shaft type	Part No.
50	M62225000



Pump body	
Port BSPP 1"	Port SAE 1"1/4
M80200016	M80200017

Seeger	
Part No.	M8020050

Seeger	
Part No.	M8020040

Shaft	
Type	Part No.
50	K2250000



Shaft-seal	
Part No.	Type
M8020060	NBR
M8020065	FPM
M8020067	EPDM

Pump seal kit	
Parts	Type
M6335500 M6335510 M6050520	NBR FPM (Viton®) EPDM

Inlet body	
Part No.	M8020112

Pump cover	
Part No.	M8050350

Screw	
Part No.	M8020140
Torque to 102 Nm (9/10 lb.in.)	

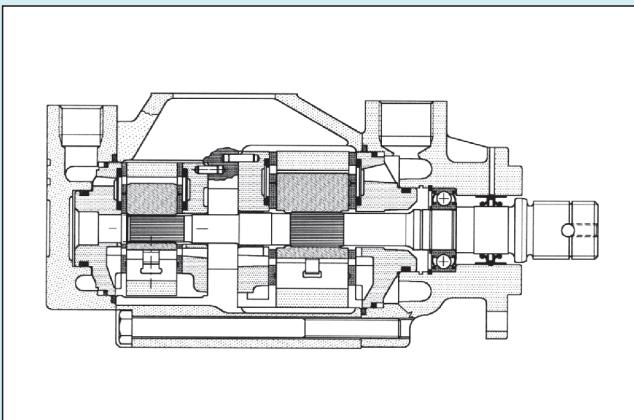

### General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in several versions with rated capacities from 82 to 134 l/min (from 22 to 35 gpm) at 1000 rpm and 7 bar.

### Technical characteristics

Cartridge model	Geometric displacement		Rated capacity at 1000 rpm 7 bar		Rated capacity at 1200 rpm 7 bar		Rated capacity at 1500 rpm 7 bar		Maximum pressure with mineral oil		Speed range rpm	
shaft end	cm³/g	(in³/r)	l/min	(gpm)	l/min	(gpm)	l/min	(gpm)	bar	(psi)	min	max
<b>A03-24</b>	78,3	(4.78)	75,0	(20.0)	90	(24)	115,3	(30.5)	210	(3050)	600	2500
<b>A03-28</b>	91,2	(5.56)	88,3	(23.3)	106	(28)	131,8	(34.8)	210	(3050)	600	2500
cover end	cm³/g	(in³/r)	l/min	(gpm)	l/min	(gpm)	l/min	(gpm)	bar	(psi)	min	max
<b>A01-02</b>	7,2	(0.44)	6,9	(1.7)	8,3	(2)	10,4	(2.8)	210	(3050)	600	2700
<b>A01-05</b>	18,1	(1.10)	17,3	(4.2)	20,8	(5)	26,1	(6.9)	210	(3050)	600	2700
<b>A01-08</b>	27,4	(1.67)	26,5	(6.7)	31,8	(8)	39,4	(10.4)	210	(3050)	600	2700
<b>A01-09</b>	30,1	(1.83)	29,2	(7.5)	35,1	(9)	44,1	(11.7)	210	(3050)	600	2700
<b>A01-11</b>	36,4	(2.22)	35,3	(9.2)	42,4	(11)	52,6	(13.9)	210	(3050)	600	2700
<b>A01-12</b>	39,5	(2.41)	39,1	(10.0)	46,9	(12)	58,7	(15.5)	160	(2300)	600	2700
<b>A01-14</b>	45,9	(2.79)	45,8	(11.7)	54,9	(14)	69,6	(18.4)	140	(2030)	600	2700

**Hydraulic fluids:** mineral oils, phosphate ester based fluids.

**Viscosity range (with mineral oil):** from 13 to 860 cSt. (13 to 54 cSt. recommended).

**Filtration:** for the inlet - 149 micron abs., for the return line - 25 micron abs. or better (**with synthetic fluids:** for the return line - 10 micron abs. or better).


**Inlet pressure (with mineral oil):** from -0,17 to +0,35 bar (-2.5 + 5 psi)

**Operating temperature:** with mineral oil -10°C to +70°C (+30°C to +60°C recommended).


**Drive:** direct and coaxial by means of a flexible coupling.

## Main operating data

**max pressure / hydraulic fluid**

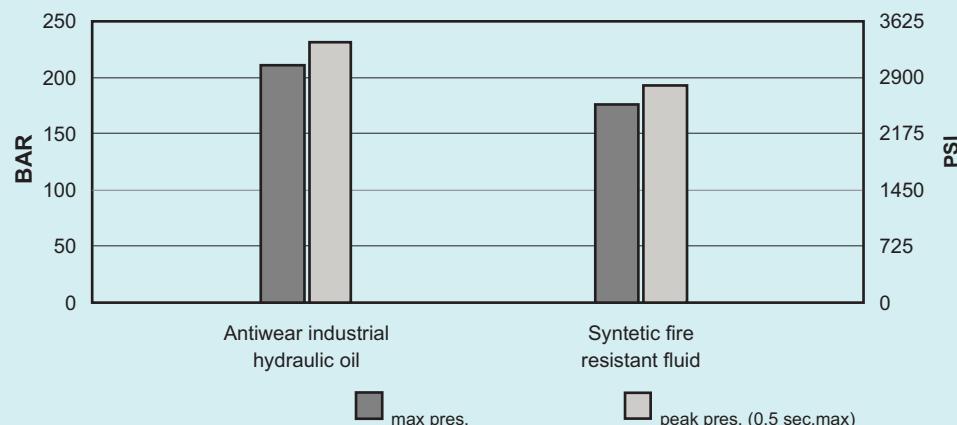


**max speed / hydraulic fluid** (with 0 bar in the intake pipe)


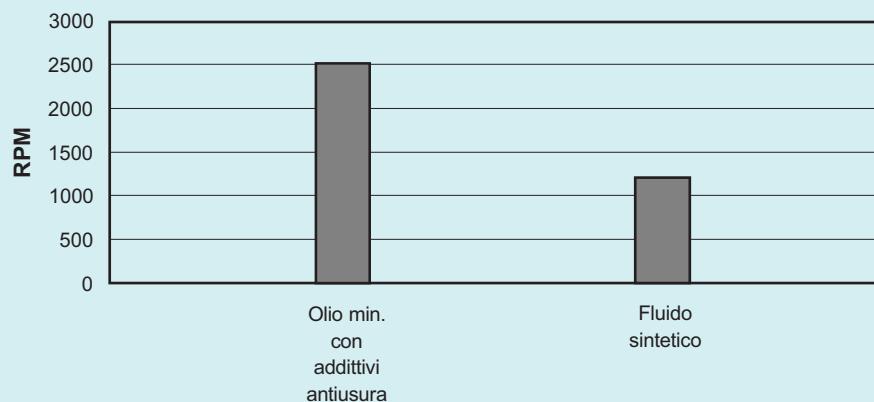


If the intake pressure is not zero bar, use the graph below to find the percentage correction factor to apply to the maximum speed.


**max speed / intake pipe pressure**

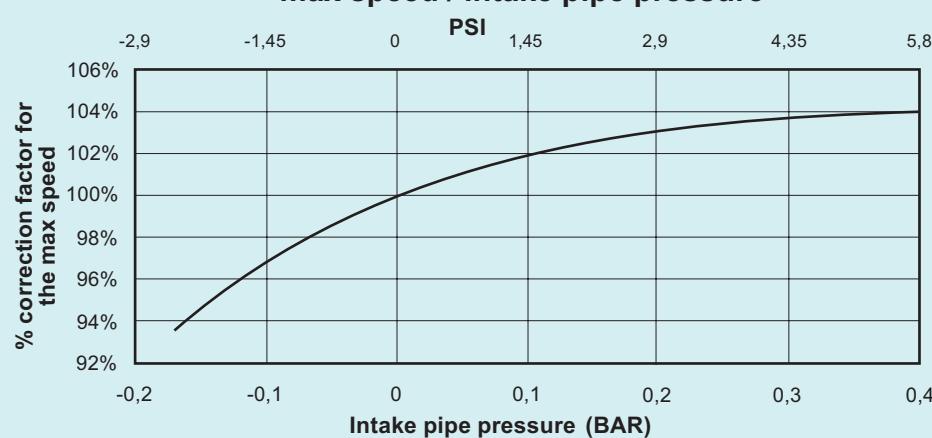

### Shaft end cartridge A03-24

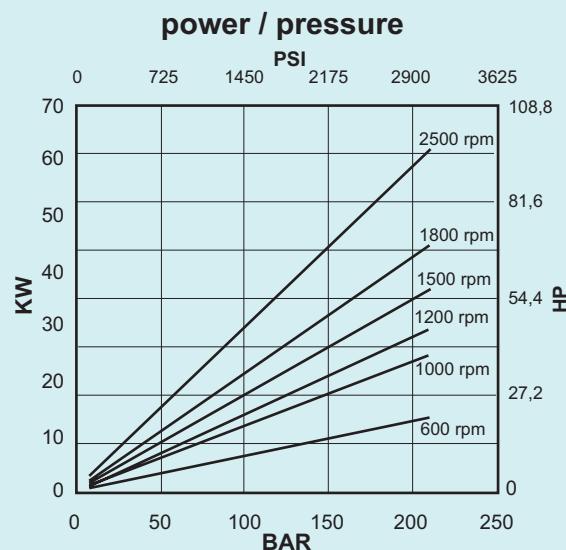
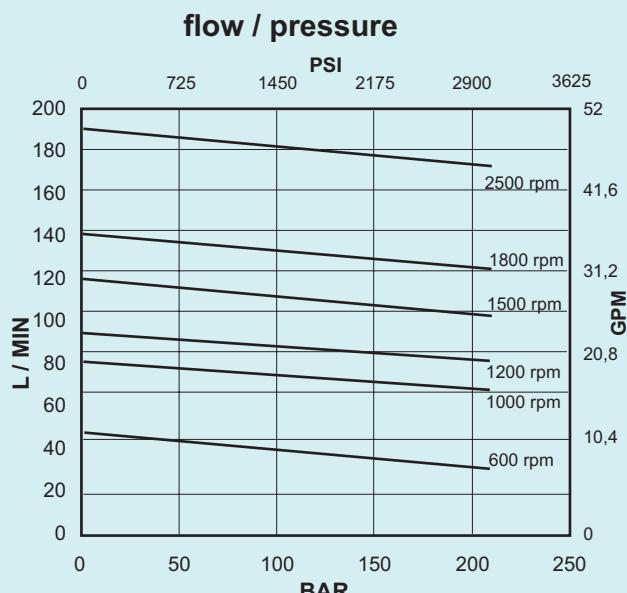


### input torque / pressure

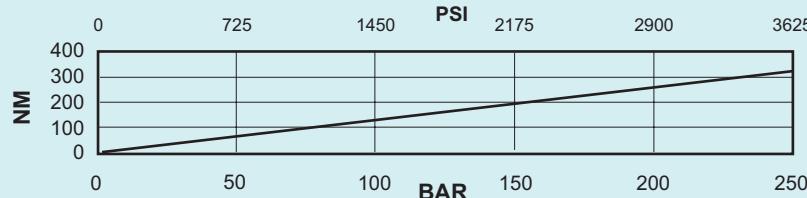


Oil viscosity: 25 c.St. (10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR




### Shaft end cartridge A03-28

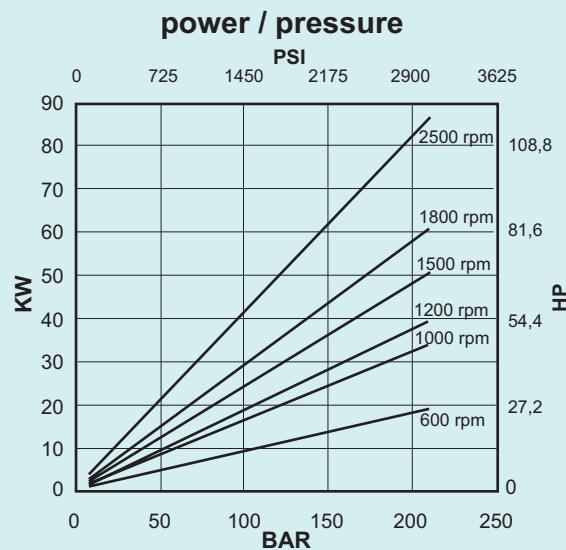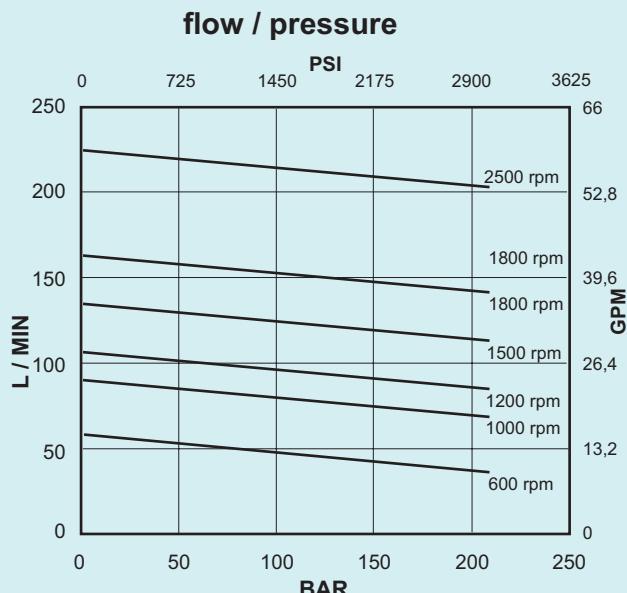



### input torque / pressure

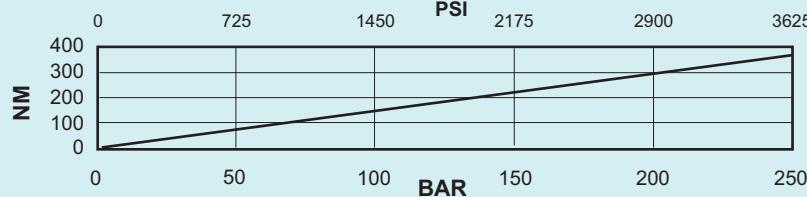

Oil viscosity: 25 c.St. (10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR

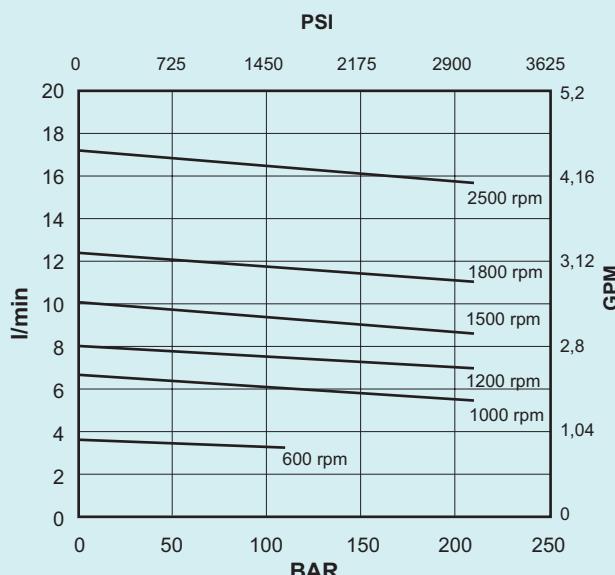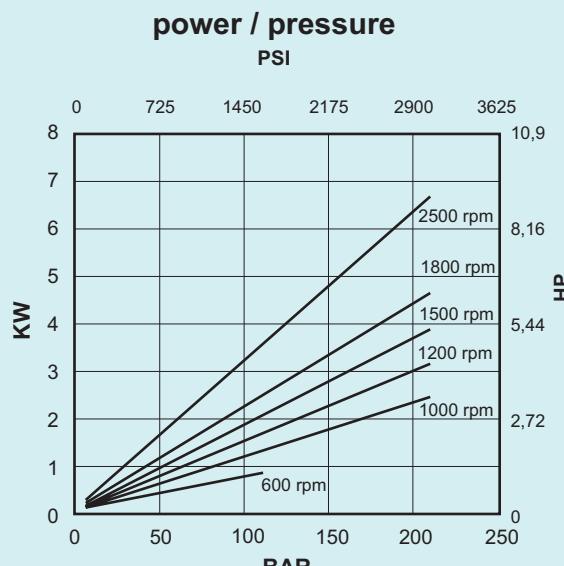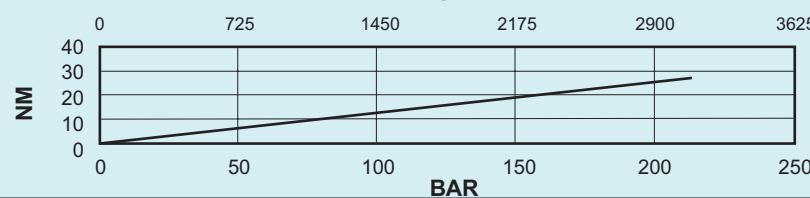
**flow / pressure****Cover end cartridge A01-02****input torque / pressure**

Oil viscosity: 25 c.St.(10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR

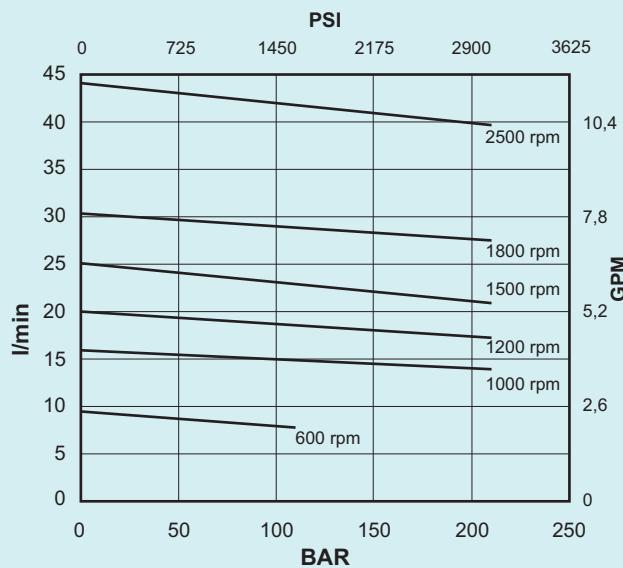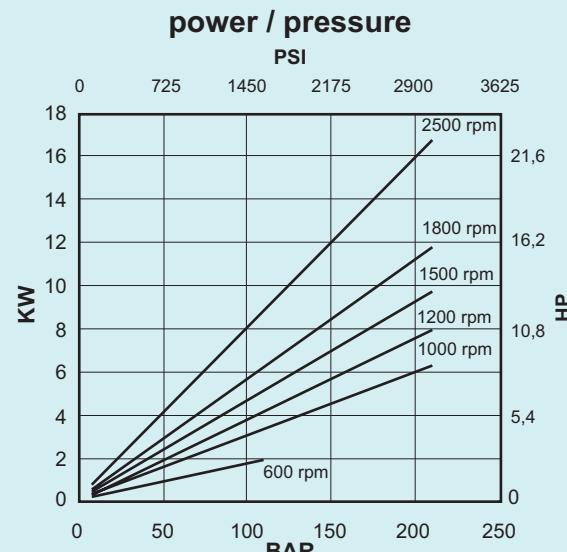
**flow / pressure****Cover end cartridge A01-05****input torque / pressure**

Oil viscosity: 25 c.St.(10W)  
Temperature: 45°C  
Inlet pressure: 0 BAR


### Cover end cartridge A01-08

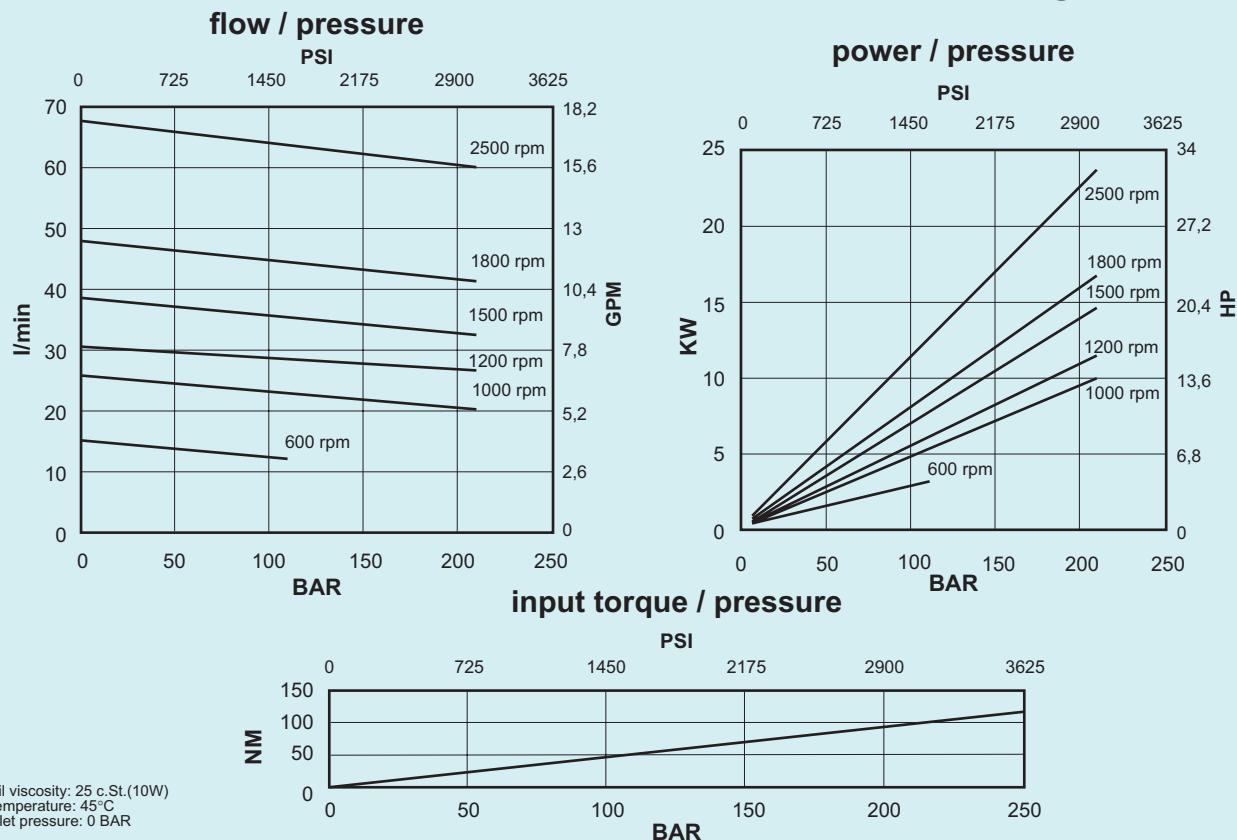


### Cover end cartridge A01-09

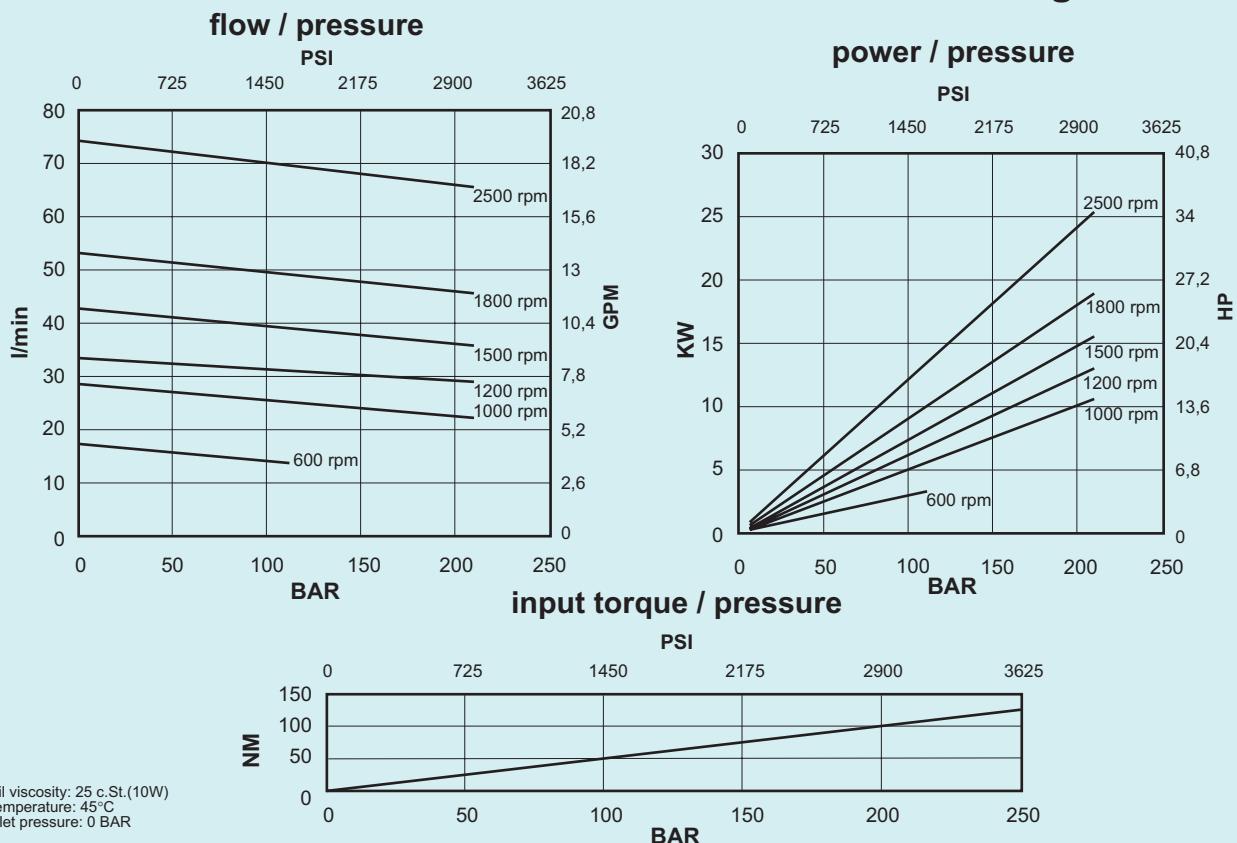


### Cover end cartridge A01-11

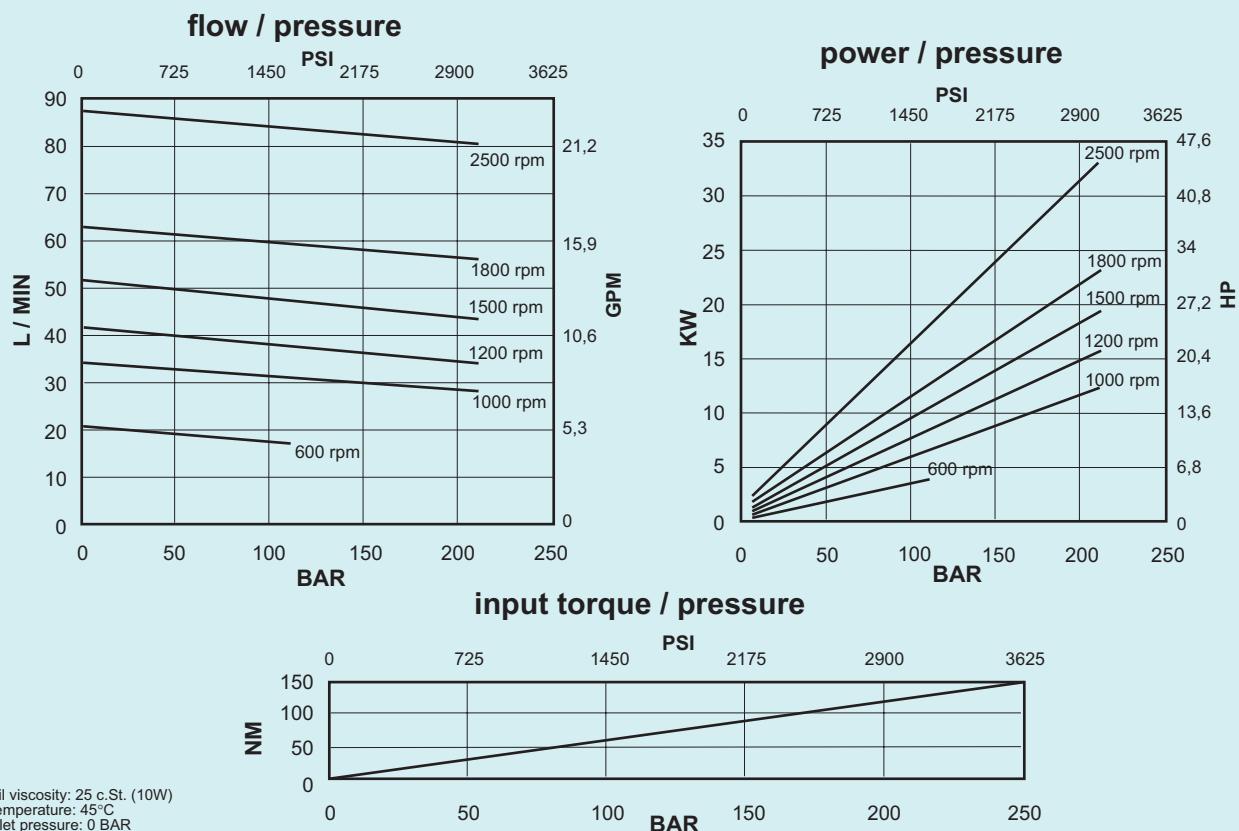


### Cover end cartridge A01-12

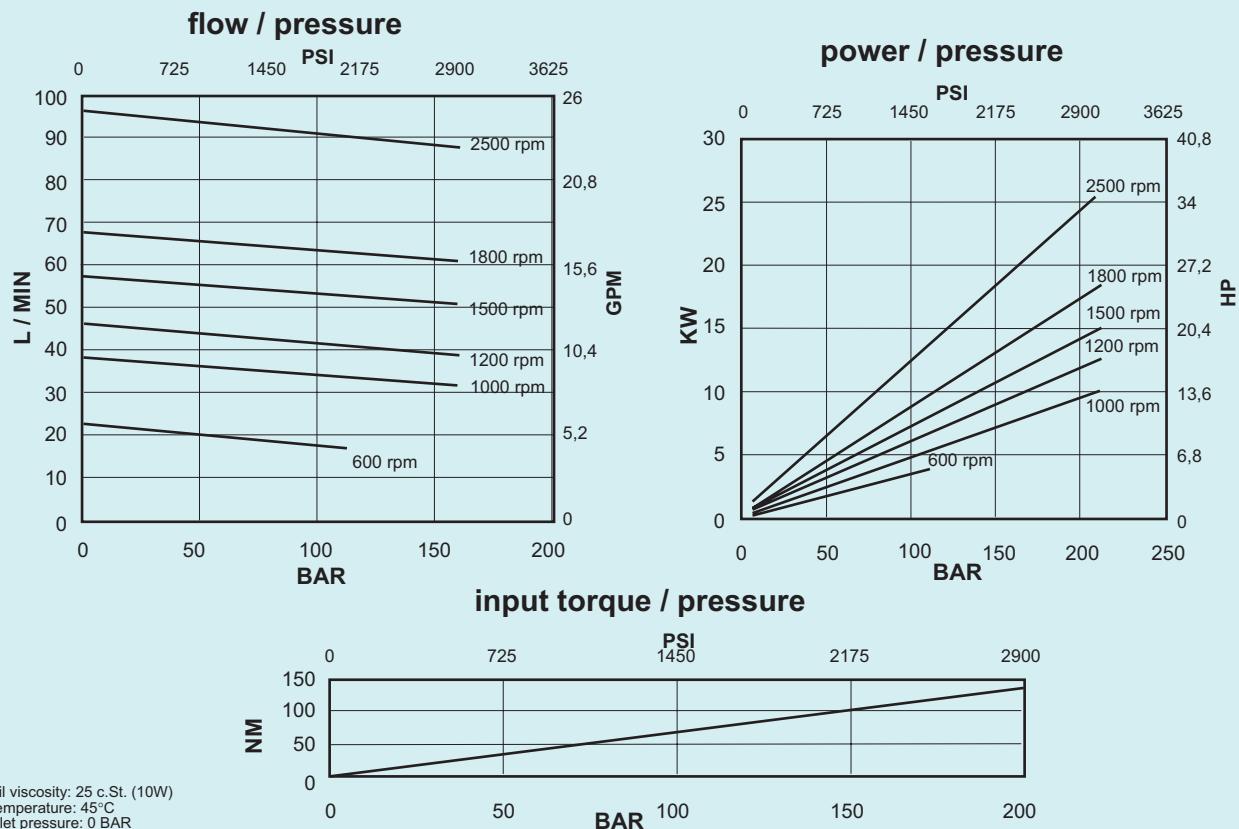

### Cover end cartridge A01-14

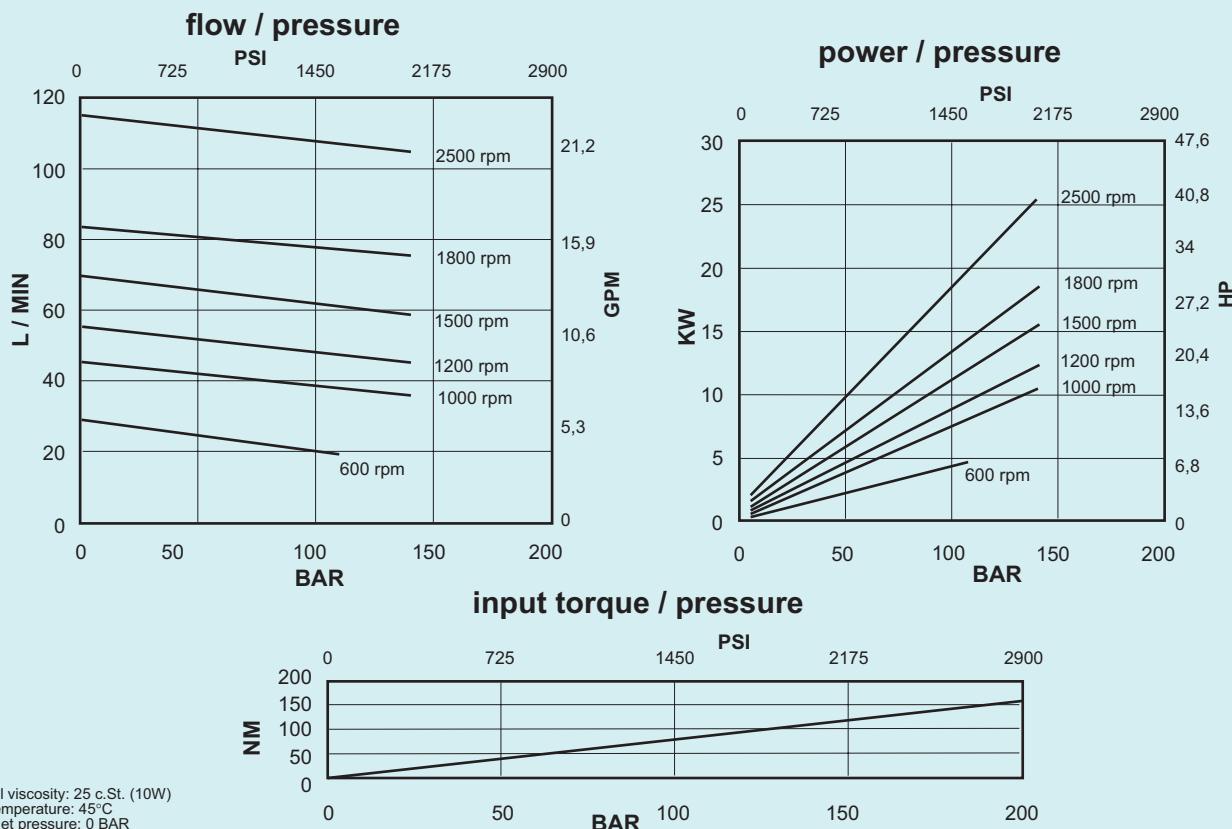

### Installation dimensions mm (inches)

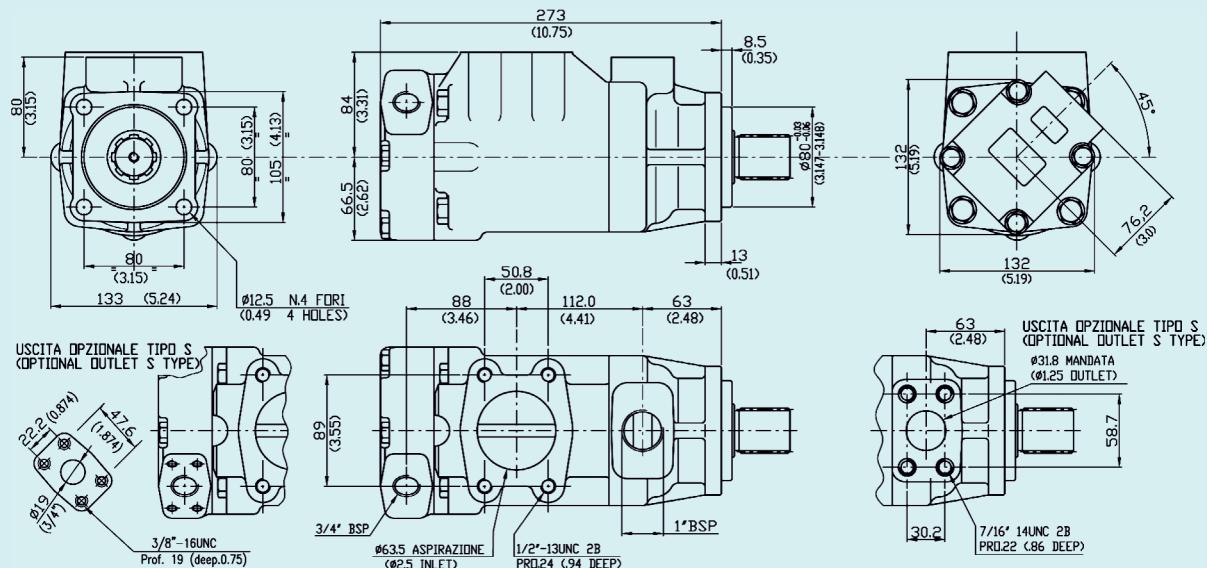

Approx. weight: 22,7 kg. (50 lbs.)

Model code breakdown

HQ    31    G    \* \*    \* \*    \* \*    \*    (L)    (\*)

Pump series

Design

Pump type

Cartridge types

- shaft end 24 28

- cover end 02 05 08 09 11 12 14

Body outlet port positions

(outlet viewed from cover end)

A = Outlet opposite end

B = Outlet 90° CCW from inlet

C = Outlet in line with inlet

D = Outlet 90° CW from inlet

Cover outlet port positions

(outlet viewed from cover end)

A = Outlet 135° CCW from inlet

B = Outlet 45° CCW from inlet

C = Outlet 45° CW from inlet

D = Outlet 135° CW from inlet

Seals

((mit with standard seals and  
shaft-seals in NBR))V = seals and shaft-seals in  
FPM (Viton®)

Rotation

(viewed from shaft end)

L = left hand rotation CCW

(omit if CW)



Outlet port connection

(omit if GAS threaded )

S = SAE port with 4 holes connection


Shaft end



50 = Splined shaft with ISO 14 four holes flange

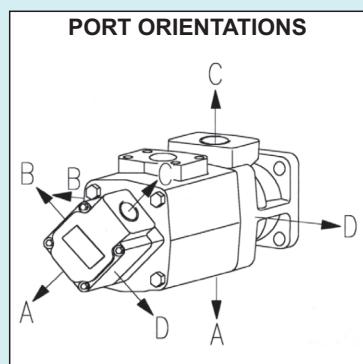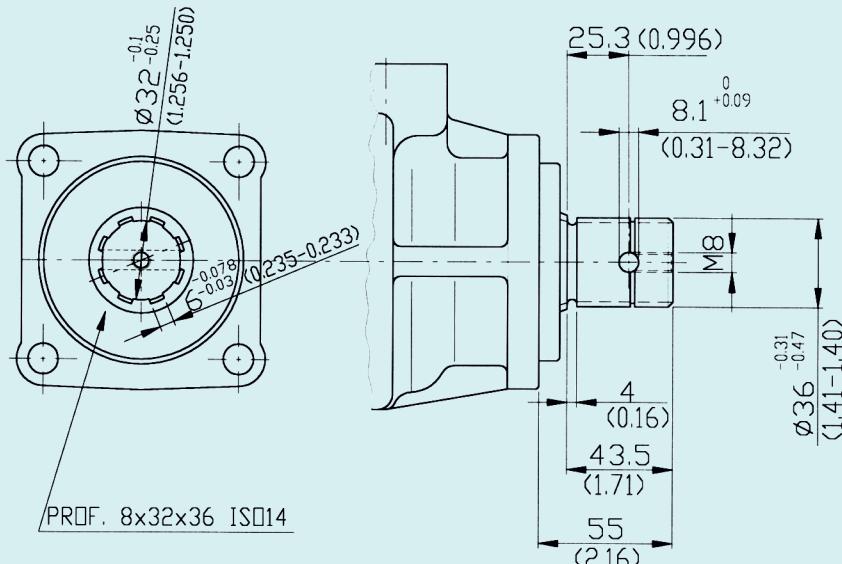Shaft mm (inches)Shaft  
50

## Id. codes of pump components

Cartridges			
	Cover end	Shaft end	Pump rotation
Series	Model	Part No.	Series Model Part No.
A01	02	A0102000	A03 24 A0324030
	05	A0105010	A03 28 A0328070
	08	A0108030	
	09	A0109050	
	11	A0111070	
	12	A0112090	
A01	12	A0114110	
	14	A0102005	A03 24 A0324040
	02	A0105020	A03 28 A0328080
	05	A0108040	
	08	A0109060	
	11	A0111080	
A01	12	A0112100	
	14	A0114120	
			right hand
			left hand

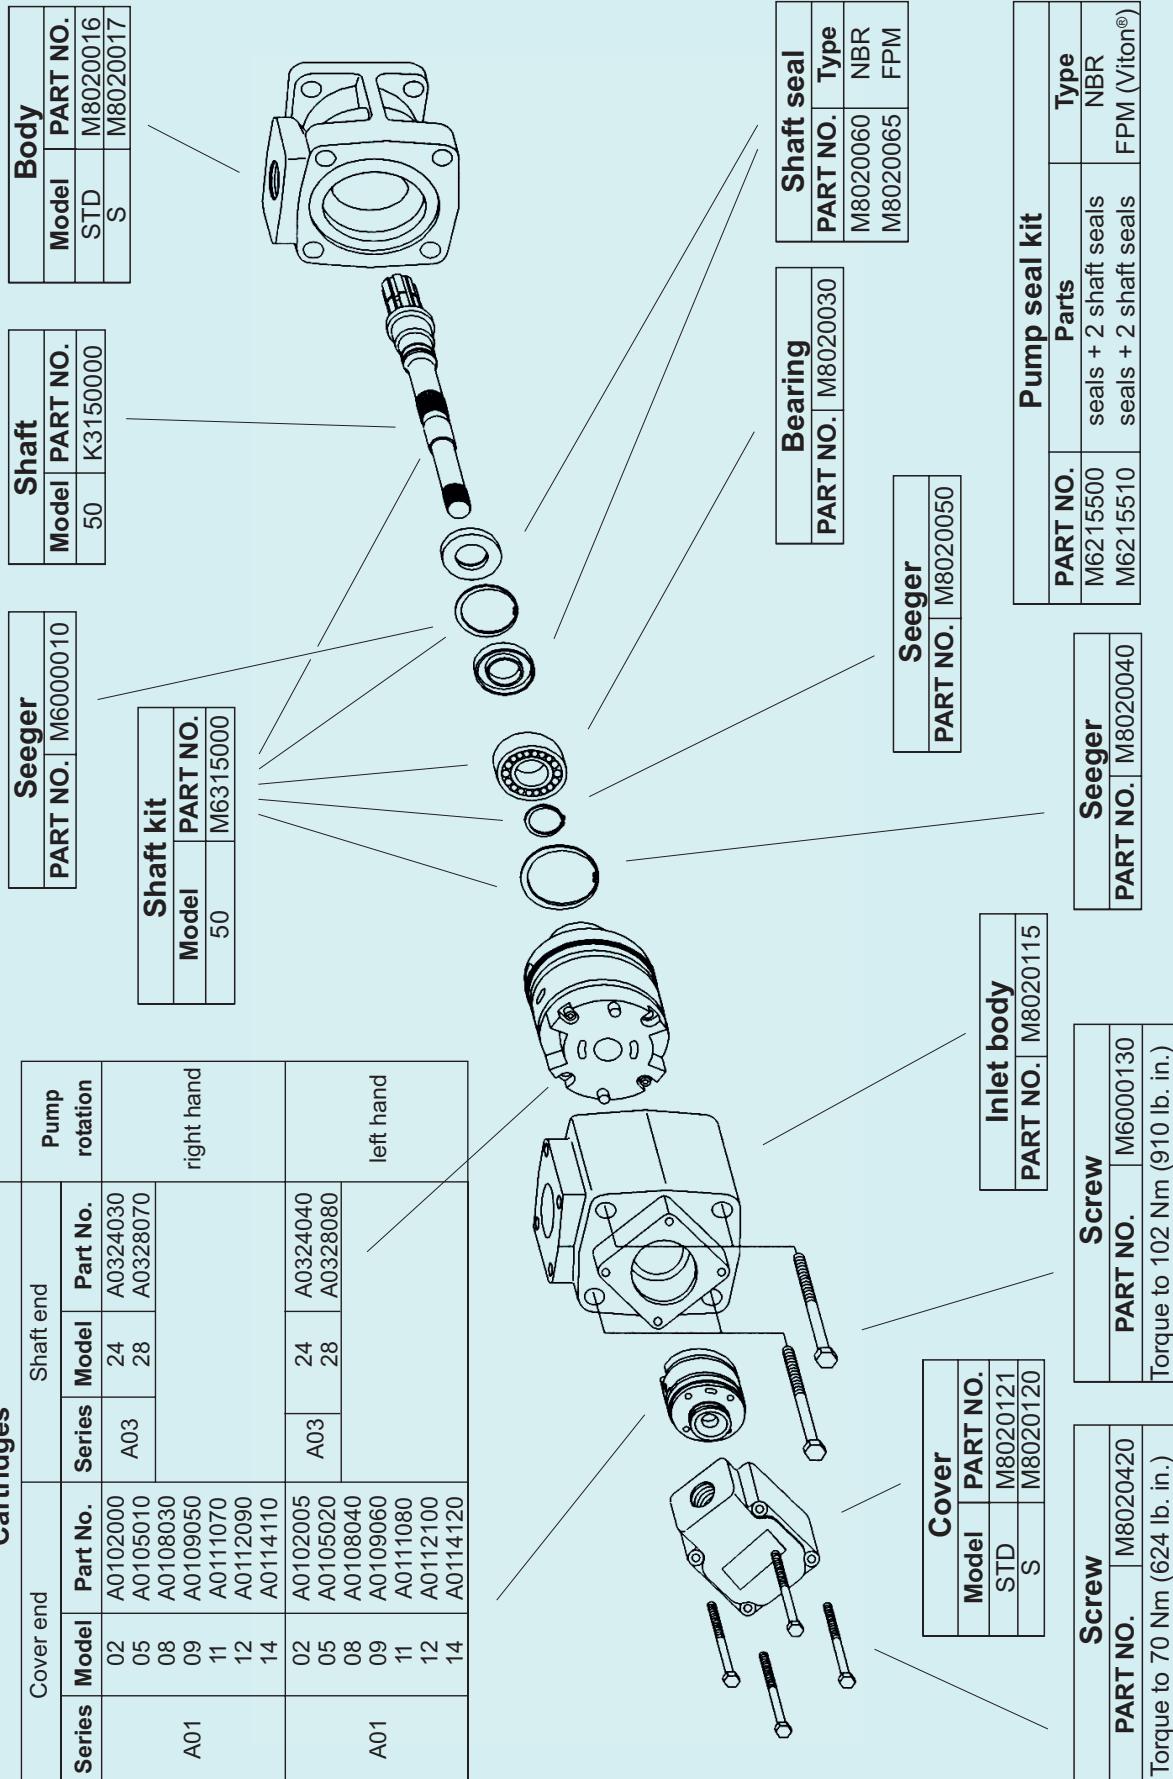

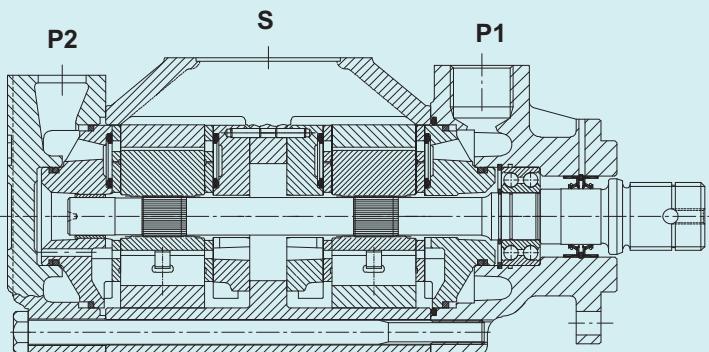

### General description

Fixed displacement vane pump, hydraulically balanced, with capacity determined by the type of cartridge used and the speed of rotation. The pump is available in several versions with rated capacity from 156 to 182 l/min (from 41 to 48 gpm) at 1000 rpm and 7 bar pressure.

### Technical characteristics (P1 and P2 sections)

Cartridge model	Geometric displacement	Rated capacity at 1000 rpm 7 bar	Rated capacity at 1500 rpm 7 bar	Maximum pressure with mineral oil	Speed range rpm
	cm <sup>3</sup> /g (in <sup>3</sup> /r)	l/min (gpm)	l/min (gpm)	bar (psi)	min max
A03-24	78,3 (4.78)	78 (24)	115,3 (30.5)	210 (3050)	600 2500
A03-28	91,2 (5.56)	91 (28)	131,8 (34.8)	210 (3050)	600 2500

**Hydraulic fluids:** antiwear high quality mineral oils or fluid based on phosphate ester.

**Viscosity range:** (with mineral oil) from 13 to 860 cSt. (13 to 54 cSt. recommended).



**Filtration:** for the inlet - not less than 149 micron abs., for the return line - 25 micron abs. or smaller (with synthetic fluids: for the return line - 10 micron abs. or smaller).

**Inlet pressure:** (with mineral oil): from -0,17 to +1,4 bar (-2.5 to + 20 psi)


**Operating temperature:** with mineral oil -10°C +70°C (+30°C to +60°C recommended), with water based fluids +15°C to +50°C.

**Drive:** direct and coaxial by means of a flexible coupling.


## Main operating data

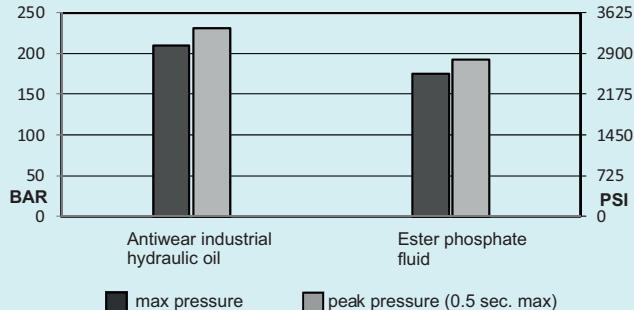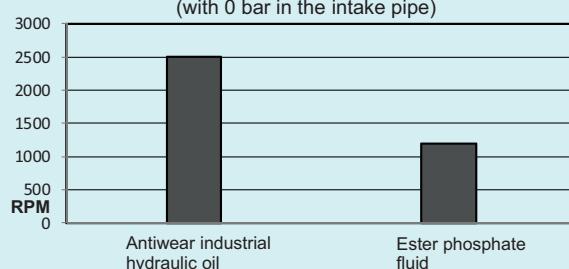**max pressure / fluid type**

**max speed / fluid type**

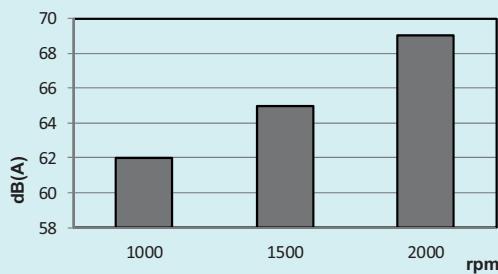**sound level for each section**


at 138 bar (2000 psi), cart. A03-24

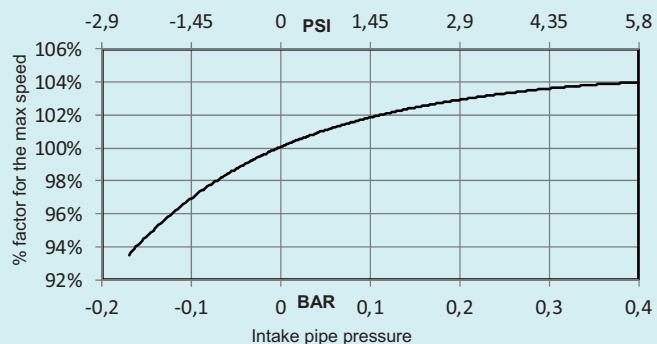

If the intake pressure is not zero bar, use the graph below to find the percentage correction factor to apply to the maximum speed

**max speed / intake pipe pressure**


## Installation dimensions mm [inches]

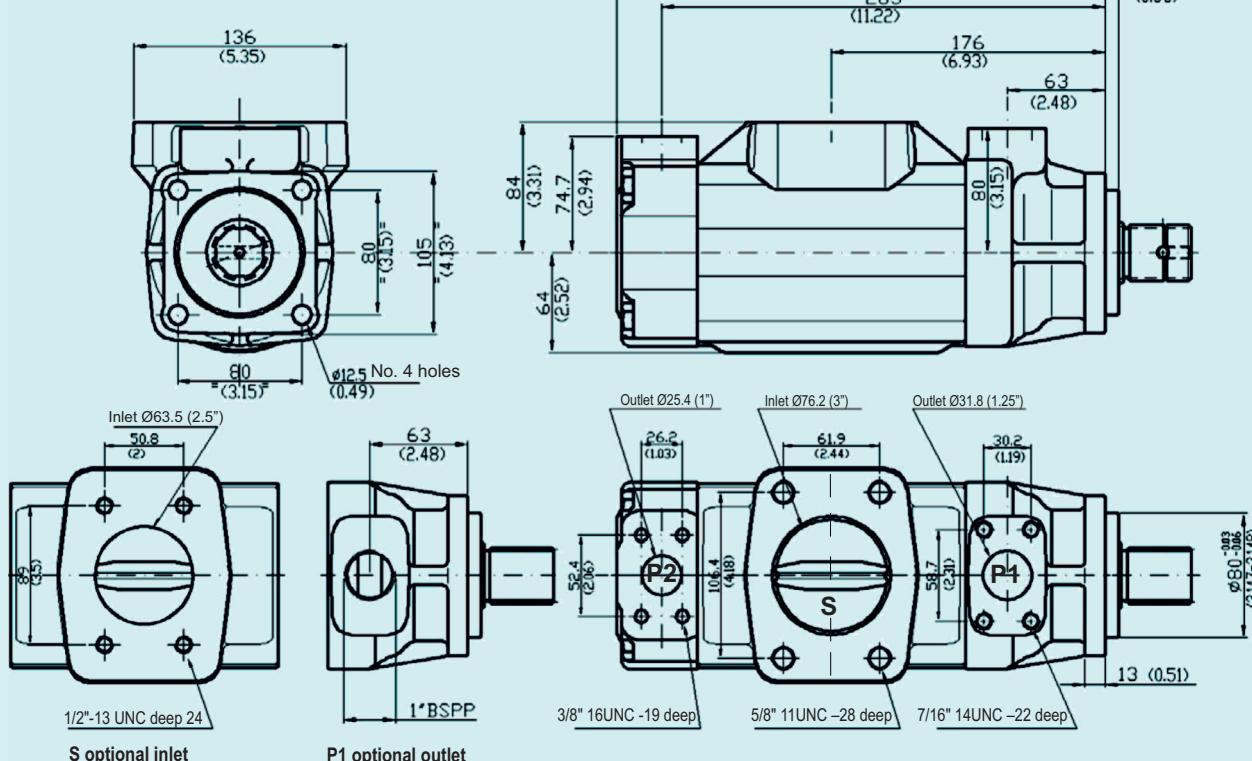
**STANDARD VERSION - "D"**

Approx. weight: 29 Kg (63 lbs)

### Model code breakdown

**HQ**    **33**

Pump series

Pump type

Cartridge model  
(P1 and P2 sections)

24 28

**G**    **\*\***    **\*\***    **\***    **\***    **\*\***    **\***    **\***    **\***

Design

Body outlet port positions

(outlet viewed from cover-end)

**A** = Outlet opposite end

**B** = Outlet 90°CCW from inlet

**C** = Outlet inline with inlet

**D** = Outlet 90°CW from inlet

Cover outlet port positions

(outlet viewed from cover-end)

**A** = Outlet opposite end

**B** = Outlet 90°CCW from inlet

**C** = Outlet inline with inlet

**D** = Outlet 90°CW from inlet

Seals

(omit with standard seals and shaft-seals in NBR)

**V** = seals and shaft-seals in FPM (Viton®)

**E** = seals and double shaft-seals in EPDM in EPDM

Rotation

(viewed from shaft-end)

**L** = Left hand rotation CCW  
(omit if CW)

Port options

**A** = S-2"1/2; P1-1"BSPP; P2-1" Sae

**B** = S-2"1/2; P1-1.25"Sae; P2-1" Sae

**C** = S-3"; P1-1"BSPP; P2-1" Sae

**D** = S-3"; P1-1.25"Sae; P2-1" Sae

"D" is the standard version


Shaft end options

**50** = Splined shaft with 4 holes flange ISO 14


### Shaft options

mm [inches]

Type 50

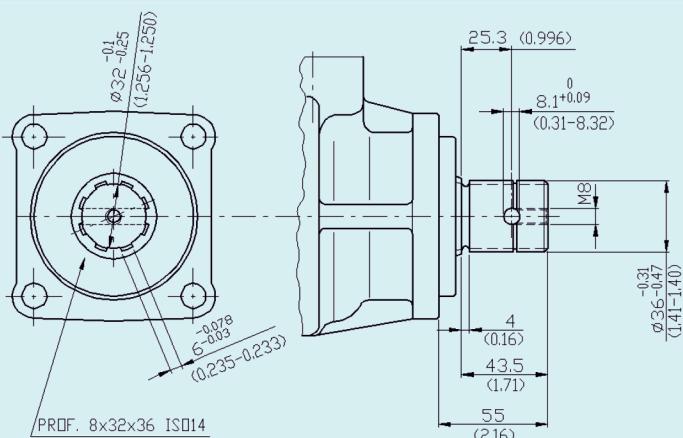

Outlet orientations

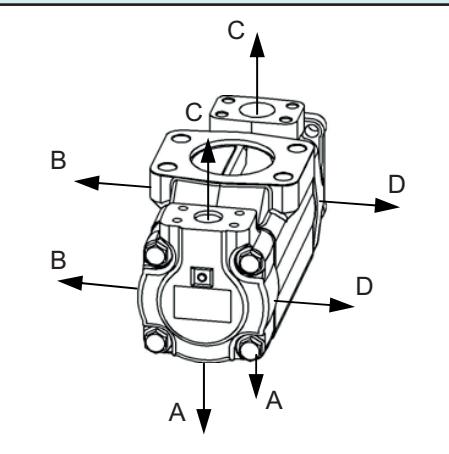

## Id. codes of pump components

<b>Cartridges</b>			
<b>Series</b>	<b>Model</b>	<b>cover end</b>	<b>Shaft end</b>
		<b>Part No.</b>	<b>Part No.</b>
A03	24	A0324047	A0324020
	28	A0328087	A0328060
A03	24	A0324037	A0324010
	28	A0328077	A0328050

<b>Pump body</b>	
<b>Part No.</b>	<b>Port BSPP 1"</b>
M8020016	Port SAE 1"1/4
M8020017	

<b>Shaft</b>	
<b>Type</b>	<b>Part No.</b>
50	K3350000

<b>Shaft kit</b>	
<b>Shaft type</b>	<b>Part No.</b>
50	M63335000

<b>Shaft-seal</b>	
<b>Part No.</b>	<b>Type</b>
M8020060	NBR
M8020065	FPM
M8020067	EPDM

<b>Seeger</b>	
<b>Part No.</b>	<b>Part No.</b>
M8020040	M8020050

<b>Bearing</b>	
<b>Part No.</b>	<b>Part No.</b>
M8020035	

<b>Pump seal kit</b>	
<b>Part No.</b>	<b>Parts</b>
M6335500	seals + shaft-seal
M6335510	seals + shaft-seal
M6050520	seals + shaft-seal

<b>Inlet body</b>	
<b>Port SAE 3"</b>	<b>Part No.</b>
M8020117	
M8020118	


  

<b>Pump cover</b>	
<b>Part No.</b>	<b>Part No.</b>
M8050350	

<b>Screw</b>	
<b>Part No.</b>	<b>Torque to 102 Nm (910 lb.in.)</b>

### Id. codes of cartridge kit components

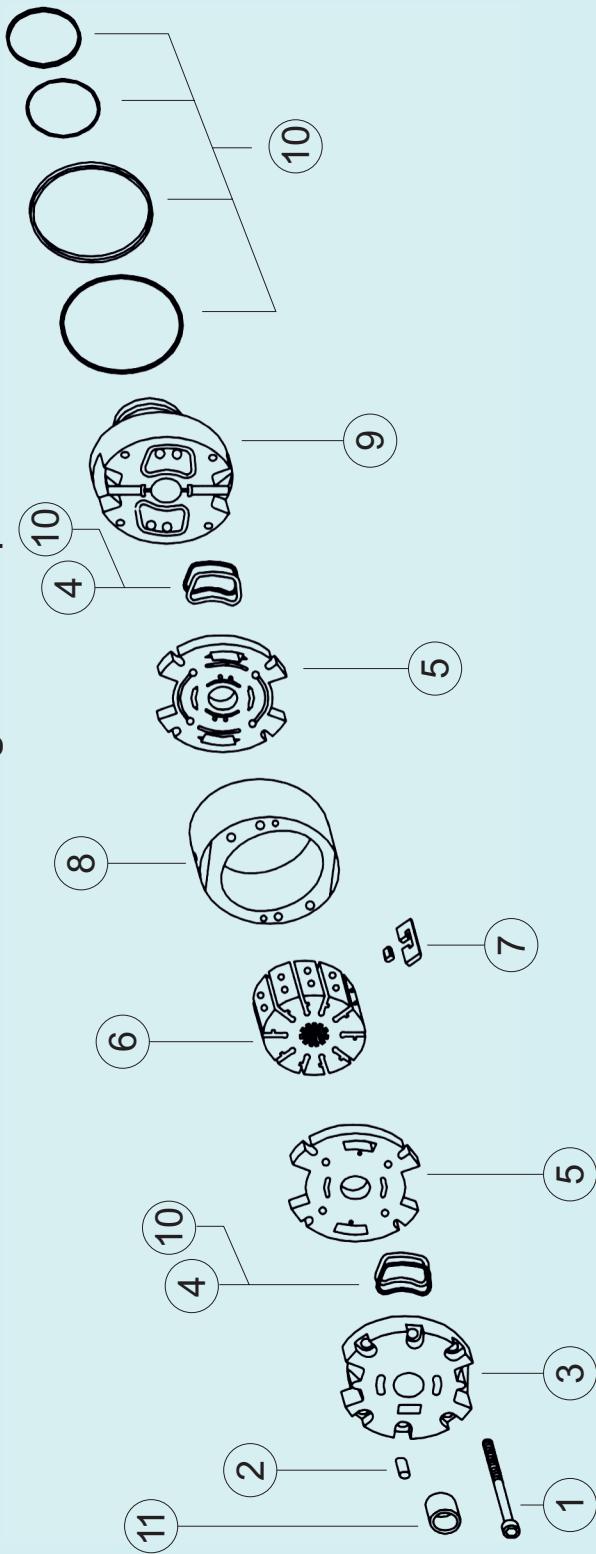

Cartridge Series Model	1	2	3	4	5	6	7	8	9	10	11
<b>A01</b>	02	L7209200			L7209300	L7209100	L7209002				
	05	L7209200			L7209300	L7209100	L7209005				
	08	L7209200			L7209300	L7209100	L7209008				
	09	L7200900	L7200800	L7200715	L7209300	L7209100	L7209009	L7200100	L7201100	L7200600	
	11	3,6 Nm (32 lb. in.)	L7200200	L7200300	L7200300	L7201200	L7201011				
	12	L7200200		L7200300	L7200300	L7201200	L7201012				
	14	L7200200			L7200300	L7201200	L7201014				
<b>A02</b>	12							L7251012			
	14							L7251014			
	17	L7250900	L7250800	L7250200	L7251300	L7250300	L7251200	L7250100	L7251100	L7250600	
	19	5,5 Nm (49 lb. in.)						L7251017	L7252100 (FPM)		
<b>A03</b>	21	L7300900	L7250800	L7250200	L7251300	L7250715	L7300300	L7301200	L7301024	L7251100	
	24	5,5 Nm						L7301028	L7301000	L7252100 (FPM)	L7250600

(\* ) Note: the cover end cartridge of the double pump is without bushing.

## Operating instructions

**Maximum speed:** the maximum speeds given in this catalogue are valid for an atmospheric pressure of 1 bar (14.7 psi) and with ambient temperature in the range of +30°C to +50°C. Higher speeds than those given cause a reduction in the volumetric efficiency, due to cavitation phenomena in the inlet area inside the pump. Sustained excess speed causes a rapid deterioration of the internal components reducing the lifetime of the cartridge.

**Minimum speed:** In general, the min. speed for all pumps is 600 rpm. However, it is possible to operate at lower speeds with certain pump configurations and with appropriate operating temperatures.

**Inlet pressure:** the inlet pressure, measured at the inlet port, should remain within the prescribed limits. Note that pressures lower than minimum limit cause cavitation and pressures above the maximum limit cause abnormal loads on the shaft and the bearings. In both cases this causes a significant reduction in the lifetime of the cartridge.

**Maximum outlet pressure:** the maximum outlet pressure is different for each type of fluid used as can be seen from the corresponding diagrams. With optimal temperature and filtration conditions a pressure peak of +10% is permissible for a maximum time of 0.5 sec.

**Mounting and drive connections:** consider the following indications when preparing the installation drawings for the system:

- avoid axial and radial loads on the shaft;
- the mounting flange has to be perpendicular to the drive shaft, with a maximum error of 0.18 mm every 100 mm;
- when mounting onto a gearbox, or other component without a flexible coupling, it is advisable to check the clearance between splines that has to be between 0.013 and 0.051 mm on the pitch diameter.

**Hydraulic circuit:** always install a pressure relief valve on the supply line to prevent the pressure from exceeding the allowed maximum. Normally, it is set in accordance with the weakest component in the system. (In the case where it is the pump, set the valve to a pressure 15% higher than the maximum pressure rating of the pump.)

Inlet line tubing should have a section equal to or greater than that of the inlet port of the pump. It is advisable to keep the tube connecting the pump to the reservoir as short possible. Particular care has to be taken with the inlet line which has to be hermetically sealed to avoid entraining air into the circuit; this varies the characteristics of the hydraulic fluid causing the operating parts to become damaged

**Filtration:** the inlet line filter must have a flow rate capacity that is higher than that of the pump at its maximum operating speed. The filtration requirements for individual models are given in this catalogue. The use of a filter bypass is recommended for cold starts and should the filter become clogged. Proper maintenance of the filter element is essential for the correct operation of the entire system. In normal conditions replace the filter element after the first 50 hours of operation. Subsequently, replace it at least every 500 hours. Regarding the filter on the return line, the same general conditions apply as for the inlet line and it should be positioned in an accessible location for ease of maintenance.

**Tank:** if possible, the reservoir should be positioned above the pump. Otherwise, ensure that the minimum level of the fluid contained in it is higher than the pump inlet line opening. It is important to avoid draining the inlet line with the pump at standstill. The opening of the return line into the reservoir must remain below the minimum level of the fluid in the reservoir. It must not be positioned too close to the opening of the inlet line to avoid the possibility of any air bubbles passing into the inlet line. Baffles inside the reservoir may be useful in avoiding the problem. Rapid temperature changes can cause condensation on the underside of the lid of the reservoir with the formation of droplets of water that can fall into the oil. To avoid this problem it is recommended that the lid should have small vents so that the air space in the reservoir is ventilated. The vents have to be screened, though, to prevent the entry of dust or the sudden expulsion of fluid.

**Start-up:** use the following procedure when the pump is started-up for the first time:  
completely fill the pump and the inlet line with fluid;

start the engine for approximately one second a number of times at regular intervals of approximately 2 or 3 seconds until the noise level reduces, thereby confirming that it has been primed;

with a manometer check to ensure that the outlet pressure increases slightly;

once the pump has been primed, maintain low pressure levels activating all parts of the circuit a number of times until air bubbles disappear completely from the return line to the reservoir.

This procedure should be carefully as any residual air inside the pump can quickly cause the rotor to seize.

**Cold starting:** when starting the pump, especially with low ambient temperatures, operate with moderate speed and pressure until the average temperature in the entire circuit is within the given limits.

The information provided in this catalogue is subject to change without notice

**jbj Techniques** is a specialist supplier of high-quality products for the mechanical power transmission and fluid power sectors. The company offers a high level of in-house expertise plus a huge selection of products to meet a very broad range of customer applications. From specification, through technical advice and manufacture to after-sales support, jbj Techniques provides a comprehensive and valued service to the power transmission and hydraulics industries. The company fields a UK-wide team of technical sales engineers to ensure that the business is close to its customers, and it enjoys excellent associations with European manufacturers, acting as sole UK distributor in many cases.

**jbj's team** is recognised for its expertise in the selection and configuration of hydraulic and mechanical transmission systems. Able to draw on an extensive product range that provides the building blocks for bespoke systems both large and small, the in-house design team offers a complete service, ranging from an assessment of customer requirements to full technical backup, including product specification, CAD based system design, system build and certification. Moreover customers can take advantage of **jbj's own machine-shop facilities and skilled engineers to guarantee quality and control costs.**

**jbj Techniques** provides one of the widest ranges of couplings available within the UK; mechanical power transmission couplings for a vast range of applications. Ranging from miniature couplings, all steel gear couplings, flexible spider couplings, shaft couplings, torque limiting couplings, disc and grid type couplings, ATEX compliant and shaft locking devices. Magnetic couplings for power transmission between hermetically sealed areas. However as extensive as the selection is, couplings make up a fraction of jbj's portfolio. As power transmission specialists the company stock and provide gearboxes, clutches, pumps, hydraulic motors, flow meters, fluid power accessories including: cooling & heat exchange products, reservoirs, pipe flanges, seals and level indicators, as well as a variety of bellhousings and engine adaptors, to name just a few of the product categories.

**jbj Techniques Limited is proud of its relationship and reputation with customers and suppliers.**

The core client base is stable and loyal, which is testament to the quality of service provided by the company. A similar relationship exists with suppliers, ensuring a continuing high quality service in which customers can have complete confidence.



Bellhousings



Torsionally Flexible Couplings



Torsionally Rigid Couplings



Torsional Couplings



Anti-static/Flameproof Couplings



Tyre Couplings



Torque Limiting Couplings



Permanent Magnetic Couplings



Hydraulic Adaptors



Engine Adaptor Kits



Dampers




*Drive line*



from  
**Small Individual Components** to  
**Large Combinations**

**“** ensuring a continuing high quality service in which customers can have complete confidence. **”**

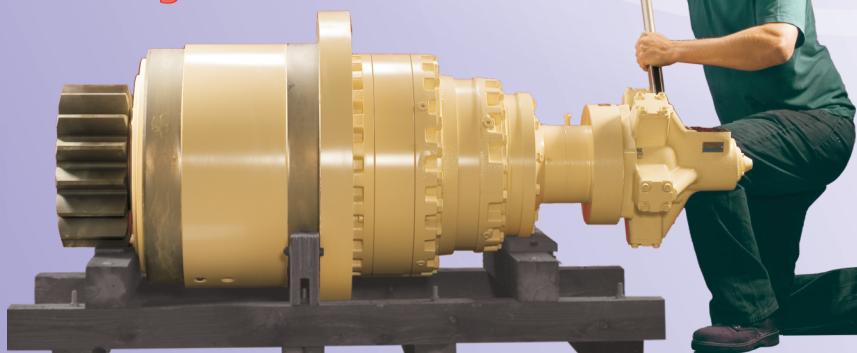



an excellence in engineering

comprehensive range of components [www.jbj.co.uk](http://www.jbj.co.uk)



Gear Pumps/Motors



Screw Pumps




Axial & Radial Piston Motors



LSHT Motors/Geared Motors



Vane Pumps

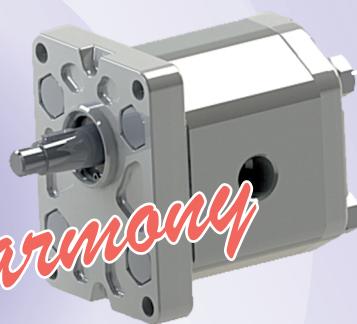

Splitter Gearboxes



Pneumatic Motors & Starters



BD Clutches & Gearboxes



BDS Clutches



Planetary Gearboxes



Coolers



Oil Bath Clutches



Flow Dividers



Tanks/Accessories



Fluid Level Indicators



Flanges



Mini Power Packs



Pressure Intensifiers



quality products for mechanical & fluid power



01737 767493



[info@bjb.co.uk](mailto:info@bjb.co.uk)



[www.bjbj.co.uk](http://www.bjbj.co.uk)



bjb Techniques Limited is ISO certified,  
committed to international coordination  
& unification of industrial standards.

- registered in England No: 1185469 -

A range of products ATEX certified  
to directive 94/9/E requirements





jbj Techniques Limited  
28 Trowers Way Holmethorpe Industrial Estate  
Redhill Surrey RH1 2LW. UNITED KINGDOM

**quality products for mechanical & fluid power**



01737 767493



info@bjj.co.uk



www.bjj.co.uk



bjj Techniques Limited is ISO certificated,  
committed to international coordination &  
unification of industrial standards.

registered in England No: 1185469

A range of products ATEX certificated  
to directive 94/9/EC requirements

